



*Handwritten signature*

Docket No.: 065933-0052

**PATENT**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of	:	Customer Number: 20277
Yoshiharu DOI	:	Confirmation Number: 6689
Application No.: 10/716,495	:	Group Art Unit: 2631
Filed: November 20, 2003	:	Examiner: Unassigned
For: RECEIVING METHOD AND RECEIVER	:	

**SUBMISSION OF CERTIFIED TRANSLATION OF PRIORITY DOCUMENT**

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Sir:

This application is entitled to have the benefit of an earlier filing date of November 20, 2002, based on Japanese patent application No. 2002-337307, pursuant to 35 U.S.C. §119. Applicant submits a certified English language translation of Japanese Application No. 2002-337307, filed November 20, 2002.

Respectfully submitted,

McDERMOTT WILL & EMERY LLP

*Brian K. Seidleck*

Brian K. Seidleck  
Registration No. 51,321

600 13<sup>th</sup> Street, N.W.  
Washington, DC 20005-3096  
Phone: 202.756.8000 AJS:TT:lnm  
Facsimile: 202.756.8087  
**Date: June 20, 2005**  
WDC99 1095906-1.065933.0052

**Please recognize our Customer No. 20277  
as our correspondence address.**



## VERIFICATION

I, Satoshi Muneta of 2-11-12, Ebisu-Nishi, Shibuya-ku, Tokyo 150-0021 JAPAN, hereby declare that I am conversant with Japanese and English languages and that I am the translator of the documents attached and certify that to the best of my knowledge and belief the attached is a true and correct translation of:

JPA (Japanese Patent Application) 2002-337307 filed on November 20, 2002

Satoshi Muneta

Satoshi Muneta

June 3, 2005

Date

[Name of Document] Patent Application  
[Reference Number] NQC1020074  
[Date of Submission] November 20, 2002  
[Addressee] Commissioner of the Patent Office

5 [International Classification] H04B 07/02  
H04B 07/08  
H01Q 03/26

[Inventor]

[Address or Residence] c/o Sanyo Electric Co., Ltd.  
10 5-5, Keihan-Hondori 2-chome, Moriguchi-shi, Osaka Japan  
[Name] Yoshiharu Doi

[Applicant]

[Identification Number] 000001889  
[Name of Applicant] Sanyo Electric Co., Ltd.

15 [Agent]

[Identification Number] 100105924  
[Patent Attorney]  
[Name] Sakaki MORISHITA  
[Telephone Number] 03-3461-3687

20 [Application Fee]

[Deposit Account Number] 091329  
[Payment Fee] ¥ 21,000

[List of Submitted Items]

[Name of Item] Specification 1  
25 [Name of Item] Drawing 1  
[Name of Item] Abstract 1

[Request of Proof] Yes

[Detailed Description of the Invention]

[Title of the Invention] RECEIVING METHOD AND RECEIVER

[Scope of Claims for Patent]

[Claim 1] A receiver, including:

5 an input unit which inputs a plurality of signals on which a processing is to be performed;

a switching unit which switches a plurality of weighting coefficients by which the plurality of inputted signals are multiplied between a plurality of first

10 weighting coefficients to be temporarily utilized and a plurality of second weighting coefficients which have higher adaptabilities;

a controller which instructs the switching unit to switch the weighting coefficients between the plurality of first weighting coefficients and the plurality of second weighting coefficients; and

a synthesizer which synthesizes results of multiplications, where the multiplications are performed on the plurality of inputted signals and the plurality of weighting coefficients.

[Claim 2] A receiver, includes:

an input unit which inputs a plurality of signals on which a processing is to be performed;

a switching unit which switches a plurality of

weighting coefficients by which the plurality of inputted signals are multiplied between a plurality of first weighting coefficients and a plurality of second weighting coefficients;

5           a controller which instructs the switching unit to switch the weighting coefficients between the plurality of first weighting coefficients and the plurality of second weighting coefficients in a prescribed interval, where the plurality of signals are inputted in a sequential manner  
10   during the interval; and

          a synthesizer which synthesizes results of multiplications, where the multiplications are performed on the plurality of inputted signals and the plurality of weighting coefficients.

[Claim 3] A receiver according to Claim 1 or Claim 2, wherein the plurality of first weighting coefficients is set in a manner that, as results of multiplications by the plurality of inputted signals, a multiplication result corresponding to one signal among the plurality of inputted signals becomes effective.

15

[Claim 4] A receiver according to Claim 3, wherein the one signal among the plurality of inputted signals is a signal having a largest value among the plurality of inputted signals.

[Claim 5] A receiver according to Claim 1 or Claim 2, wherein the plurality of first weighting coefficients is set by utilizing the plurality of second weighting coefficients which have already been set.

5 [Claim 6] A receiver according to any preceding Claim, further including:

a weighting coefficient updating unit which updates a plurality of third weighting coefficients adaptively based on the plurality of inputted signals;

10 a gap estimator which estimates gaps between the plurality of first weighting coefficients and the plurality of third weighting coefficients by performing a correlation processing between at least one of the plurality of inputted signals and a known signal; and

15 a gap compensator which generates the plurality of second weighting coefficients by compensating the plurality of third weighting coefficients based on the estimated gaps.

[Claim 7] A receiver according to any of Claim 2 to Claim 6,  
20 wherein the signals inputted during the prescribed interval in the sequential manner include signals having different characteristics, and wherein the controller instructs to switch the weighting coefficients between the first weighting coefficients and the second weighting coefficients

when it is detected a shift point where the characteristics of the signals change.

[Claim 8] A receiver according to Claim 6, wherein the controller inputs sequentially the plurality of third weighting coefficients updated in the weight coefficient updating unit and instructs the switching unit to switch the weighting coefficients between the first weighting coefficients and the second weighting coefficients when fluctuation of the plurality of third weighting coefficients converges within a prescribed range.

[Claim 9] A receiving method, including:

5       inputting a plurality of signals on which a processing is to be performed;

          switching a plurality of weighting coefficients by which the plurality of inputted signals are multiplied between a plurality of first weighting coefficients to be  
10 temporarily utilized and a plurality of a second weighting coefficients which have higher adaptabilities;

          giving an instruction of switching the weighting coefficients between the plurality of first weighting coefficients and the plurality of second weighting  
15 coefficients; and

          synthesizing results of multiplications, where the multiplications are performed on the plurality of inputted

signals and the plurality of weighting coefficients.

[Claim 10] A receiving method, including:

inputting a plurality of signals on which a processing  
5 is to be performed;

switching a plurality of weighting coefficients by  
which the plurality of inputted signals are multiplied  
between a plurality of first weighting coefficients and a  
plurality of second weighting coefficients;

10 giving an instruction of switching the weighting  
coefficients between the plurality of first weighting  
coefficients and the plurality of second weighting  
coefficients in a prescribed interval, where the plurality  
of signals are inputted in a sequential manner during the  
15 interval; and

synthesizing results of multiplications, where the  
multiplications are performed on the plurality of inputted  
signals and the plurality of weighting coefficients.

[Claim 11] A program executable by a computer, including:

inputting a plurality of signals on which a processing  
20 is to be performed;

switching a plurality of weighting coefficients by  
which the plurality of inputted signals are multiplied  
between a plurality of first weighting coefficients to be  
temporarily utilized and a plurality of a second weighting



coefficients which have higher adaptabilities;

giving an instruction of switching the weighting coefficients between the plurality of first weighting coefficients and the plurality of second weighting

5 coefficients; and

synthesizing results of multiplications, where the multiplications are performed on the plurality of inputted signals and the plurality of weighting coefficients.

10 [Claim 12] A program executable by a computer, including:

inputting a plurality of signals on which a processing is to be performed;

switching a plurality of weighting coefficients by which the plurality of inputted signals are multiplied  
15 between a plurality of first weighting coefficients and a plurality of second weighting coefficients;

giving an instruction of switching the weighting coefficients between the plurality of first weighting coefficients and the plurality of second weighting  
20 coefficients in a prescribed interval, where the plurality of signals are inputted in a sequential manner during the interval; and

synthesizing results of multiplications, where the multiplications are performed on the plurality of inputted  
25 signals and the plurality of weighting coefficients.

[Detailed Description of the Invention]

[0001]

[Technical Field of the Invention]

The present invention relates to a receiving  
5 technology. It particularly relates to a receiving method  
and a receiving apparatus which controls a weighting  
coefficient for synthesizing radio signals received by a  
plurality of antennas.

[0002]

10 [Prior art]

In wireless communication, it is in general desired to  
effectively use limited frequency resources. In order to  
use the frequency resources effectively, radio waves of same  
frequency are, for example, utilized as repeatedly as  
15 possible in short-range. In this case, however,  
communication quality degrades because of cochannel  
interference caused by a radio base station or mobile  
terminal closely located, which utilizes the same frequency.  
As one technology for preventing such communication quality  
20 degradation deriving from the cochannel interference, the to  
provide a receiver having simple arithmetic circuits, of  
which the processing delay is small technology can be named.

[0003]

In the adaptive array antenna technology, signals  
25 received by a plurality of antennas are respectively  
weighted with different weighting coefficients and

synthesized. The weighting coefficients are adaptively updated so that an error signal between a signal to be transmitted and the signal after the synthesis might be small. Here, the signal to be transmitted is determined  
5 based on the signal after synthesis. In order to update the weighting coefficients adaptively, the RLS (Recursive Least Squares) algorithm, the LMS (Least Mean Squares) algorithm or the like is utilized. The RLS algorithm generally converges at high speed. The RLS algorithm, however,  
10 requires a high speed or a huge arithmetic circuit since computation performed is very complicated. The LMS algorithm can be realized with a simpler arithmetic circuit than that of the RLS algorithm. However, the convergence speed thereof is low.

15 [0004]

[Related Art List1]

Japanese Patent Application Laid-open No. 2002-26788

[0005]

[Problems to be solved by the Invention]

20 In utilizing the adaptive array antenna for a radio mobile terminal, it is suitable to use the LMS algorithm for updating weighting coefficients, since it is desirable that an arithmetic circuit is small. However, the convergence speed of the LMS algorithm is low in general. Thus, if it  
25 is desired to delay received signals to be synthesized until the LMS algorithm converges, processing delay becomes large

and therefore it is possibly impossible to use the adaptive array antenna in a real time application such as TV conference system where permissible delay time is limited.

On the other hand, a response characteristic generally

5 degrades if the weighting coefficients at the timing where the LMS algorithm has not converged yet in order to diminish the processing delay.

[0006]

The inventor of the present invention has made the  
10 present invention in view of the foregoing circumstances and an object thereof is to provide a receiver having simple arithmetic circuits, of which the processing delay is small. It is also an object of the present invention to provide a receiver of which the response characteristic hardly  
15 degrades even in the case the weighting coefficients have not converged yet. Moreover, it is also an object of the present invention to provide a receiver which can switch a plural types of weighting coefficients.

[0007]

20 [Means for solving the Problems]

A preferred embodiment according to the present invention relates to a receiver. This receiver includes: an input unit which inputs a plurality of signals on which a processing is to be performed; a switching unit which  
25 switches a plurality of weighting coefficients by which the plurality of inputted signals are multiplied between a

plurality of first weighting coefficients to be temporarily utilized and a plurality of second weighting coefficients which have higher adaptabilities; a controller which instructs the switching unit to switch the weighting  
5 coefficients between the plurality of first weighting coefficients and the plurality of second weighting coefficients; and a synthesizer which synthesizes results of multiplications, where the multiplications are performed on the plurality of inputted signals and the plurality of  
10 weighting coefficients.

The plurality of weighting coefficients include (A, B, C, D) of which the number of terms is equal to that of the plurality of signals, where the results of multiplications between them and (X1, Y1), (X2, Y2) become (AX1, BY1) and  
15 (CX2, DY2). The plurality of weighting coefficients also include (A, B) of which the number of terms is different from that of the plurality of signals, where the results of multiplications become (AX1, BY1) and (AX2, BY2).

The receiver described above enables to acquire a  
20 response characteristic optimal in each timing by switching the weighting coefficients which have different characteristics.

[0008]

Another preferred embodiment of the present invention  
25 also relates to a receiver. The receiver includes: an input unit which inputs a plurality of signals on which a

processing is to be performed; a switching unit which switches a plurality of weighting coefficients by which the plurality of inputted signals are multiplied between a plurality of first weighting coefficients and a plurality of second weighting coefficients; a controller which instructs the switching unit to switch the weighting coefficients between the plurality of first weighting coefficients and the plurality of second weighting coefficients in a prescribed interval, where the plurality of signals are inputted in a sequential manner during the interval; and a synthesizer which synthesizes results of multiplications, where the multiplications are performed on the plurality of inputted signals and the plurality of weighting coefficients.

The "sequential manner" merely means that the known received signal is sequential. As long as the signals are inputted sequentially, the time length does not necessarily need to be long but may be short. Moreover, the sequential manner here may include a case where the signals are inputted in a discrete manner in accordance with a certain rule, if the apparatus recognizes the rule. That is, the "sequential manner" here includes every case where the receiver can recognize the manner of inputting the signals as "sequential" one.

[0009]

The plurality of first weighting coefficients may be set in a manner that, as results of multiplications by the

plurality of inputted signals, a multiplication result corresponding to one signal among the plurality of inputted signals becomes effective. The one signal among the plurality of inputted signals may be a signal having a largest value among the plurality of inputted signals. The plurality of first weighting coefficients may be set by utilizing the plurality of second weighting coefficients which have already been set.

The receiver may further include: a weighting coefficient updating unit which updates a plurality of third weighting coefficients adaptively based on the plurality of inputted signals; a gap estimator which estimates gaps between the plurality of first weighting coefficients and the plurality of third weighting coefficients by performing a correlation processing between at least one of the plurality of inputted signals and a known signal; and a gap compensator which generates the plurality of second weighting coefficients by compensating the plurality of third weighting coefficients based on the estimated gaps.

[0010]

The signals inputted during the prescribed interval in the sequential manner may include signals having different characteristics and the controller may instruct to switch the weighting coefficients between the first weighting coefficients and the second weighting coefficients when it is detected a shift point where the characteristics of the

signals change. The controller may input sequentially the plurality of third weighting coefficients updated in the weight coefficient updating unit and may instruct the switching unit to switch the weighting coefficients between  
5 the first weighting coefficients and the second weighting coefficients when fluctuation of the plurality of third weighting coefficients converges within a prescribed range.

The receiver described above enables to acquire a response characteristic optimal in each time by switching  
10 the weighting coefficients which have different characteristics during the interval.

[0011]

Still, another preferred embodiment according to the present invention relates to a receiving method. This  
15 method includes: inputting a plurality of signals on which a processing is to be performed; switching a plurality of weighting coefficients by which the plurality of inputted signals are multiplied between a plurality of first weighting coefficients to be temporarily utilized and a  
20 plurality of a second weighting coefficients which have higher adaptabilities; giving an instruction of switching the weighting coefficients between the plurality of first weighting coefficients and the plurality of second weighting coefficients; and synthesizing results of multiplications,  
25 where the multiplications are performed on the plurality of inputted signals and the plurality of weighting coefficients.



Still another preferred embodiment according to the present invention relates to a receiving method. This method includes: inputting a plurality of signals on which a processing is to be performed; switching a plurality of  
5 weighting coefficients by which the plurality of inputted signals are multiplied between a plurality of first weighting coefficients and a plurality of second weighting coefficients; giving an instruction of switching the weighting coefficients between the plurality of first  
10 weighting coefficients and the plurality of second weighting coefficients in a prescribed interval, where the plurality of signals are inputted in a sequential manner during the interval; and synthesizing results of multiplications, where the multiplications are performed on the plurality of  
15 inputted signals and the plurality of weighting coefficients.

[0012]

The plurality of first weighting coefficients may be set in a manner that, as results of multiplications by the plurality of inputted signals, a multiplication result  
20 corresponding to one signal among the plurality of inputted signals becomes effective. The one signal among the plurality of inputted signals may be a signal having a largest value among the plurality of inputted signals. The plurality of first weighting coefficients may be set by  
25 utilizing the plurality of second weighting coefficients which have already been set.

The receiving method may further include: updating a plurality of third weighting coefficients adaptively based on the plurality of inputted signals; estimating gaps between the plurality of first weighting coefficients and the plurality of third weighting coefficients by performing  
5 a correlation processing between at least one of the plurality of inputted signals and a known signal; and generating the plurality of second weighting coefficients by compensating the plurality of third weighting coefficients  
10 based on the estimated gaps.

[0013]

The signals inputted during the prescribed interval in the sequential manner may include signals having different characteristics. In giving the instruction of switching the  
15 weighting coefficients between the first weighting coefficients and the second weighting coefficients, the instruction may be given when it is detected a shift point where the characteristics of the signals change. The plurality of third weighting coefficients updated may be  
20 inputted sequentially in giving the instruction of switching the weighting coefficients between the first weighting coefficients and the second weighting coefficients, and the instruction may be given when fluctuation of the plurality of third weighting coefficients converges within a  
25 prescribed range.

[0014]

Yet another preferred embodiment of the present invention relates to a program. The program includes: inputting a plurality of signals on which a processing is to be performed; switching a plurality of weighting

5 coefficients by which the plurality of inputted signals are multiplied between a plurality of first weighting coefficients to be temporarily utilized and a plurality of a second weighting coefficients which have higher adaptabilities; giving an instruction of switching the

10 weighting coefficients between the plurality of first weighting coefficients and the plurality of second weighting coefficients; and synthesizing results of multiplications, where the multiplications are performed on the plurality of inputted signals and the plurality of weighting coefficients.

15 Still another preferred embodiment according to the present invention relates to a program method. This program includes: inputting a plurality of signals on which a processing is to be performed; switching a plurality of weighting coefficients by which the plurality of inputted

20 signals are multiplied between a plurality of first weighting coefficients and a plurality of second weighting coefficients; giving an instruction of switching the weighting coefficients between the plurality of first weighting coefficients and the plurality of second weighting

25 coefficients in a prescribed interval, where the plurality of signals are inputted in a sequential manner during the

interval; and synthesizing results of multiplications, where the multiplications are performed on the plurality of inputted signals and the plurality of weighting coefficients.

[0015]

5           The plurality of first weighting coefficients may be set in a manner that, as results of multiplications by the plurality of inputted signals, a multiplication result corresponding to one signal among the plurality of inputted signals becomes effective. The one signal among the  
10 plurality of inputted signals may be a signal having a largest value among the plurality of inputted signals. The plurality of first weighting coefficients may be set by utilizing the plurality of second weighting coefficients which have already been set.

15           The receiving method may further include: updating a plurality of third weighting coefficients adaptively based on the plurality of inputted signals; estimating gaps between the plurality of first weighting coefficients and the plurality of third weighting coefficients by performing  
20 a correlation processing between at least one of the plurality of inputted signals and a known signal; and generating the plurality of second weighting coefficients by compensating the plurality of third weighting coefficients based on the estimated gaps.

25           [0016]

The signals inputted during the prescribed interval in

the sequential manner may include signals having different characteristics. In giving the instruction of switching the weighting coefficients between the first weighting coefficients and the second weighting coefficients, the instruction may be given when it is detected a shift point where the characteristics of the signals change. The plurality of third weighting coefficients updated may be inputted sequentially in giving the instruction of switching the weighting coefficients between the first weighting coefficients and the second weighting coefficients, and the instruction may be given when fluctuation of the plurality of third weighting coefficients converges within a prescribed range.

It is to be noted that any arbitrary replacement or substitution of the above-described structural components and the steps, expressions replaced or substituted in part or whole between a method and an apparatus as well as addition thereof, and expressions changed to a computer program, recording medium or the like are all effective as and encompassed by the present embodiments.

[0017]

[Embodiments of the Invention]

#### First Embodiment

The first embodiment of the present invention relates to a receiver provided with an adaptive array antenna which receives radio signals with a plurality of antennas as burst

signals and synthesizes the received signals with weighting them respectively by different weighting coefficients. The burst signal is composed of a known training signal which is disposed in the head part thereof and a data signal. The receiver, in order to reduce processing delay, synthesizes the received signals by weighting them with the weighting coefficients without scarcely delaying them. The weighting coefficients are updated by the LMS algorithm one after another. As the weighting coefficients in the training signal interval, however, precedently prepared weighting coefficients of an omni antenna pattern are utilized since it is often the case that the weighting coefficients have not converged yet in the initial period of the training signal interval. Weighting coefficients of adaptive array antenna pattern, which are updated by the LMS algorithm, are utilized as the weighting coefficients in the interval of the data signal.

[0018]

Fig. 1 shows a communication system including a transmitter 100 and a receiver 106 according to the first embodiment of the present invention. The transmitter 100 includes a modulator 102, a RF unit 104, and an antenna 132. The receiver 106 includes a first antenna 134a, a second antenna 134b, a n-th antenna 134n, a RF unit 108, a signal processing unit 110, and a demodulator 112. Here the first antenna 134a, the second antenna 134b and the n-th antenna

134n are generically named antennas 134.

[0019]

The modulator 102 modulates an information signal to be transmitted and generates the transmission signal (hereinafter one signal included in the transmission signal is also called as a "symbol"). Any arbitrary modulation scheme may be utilized, such as QPSK (Quadri Phase Shift Keying), 16QAM (16 Quadrature Amplitude Modulation), GMSK (Gaussian filtered Minimum Shift Keying). In the following embodiments, examples are described where the QPSK is utilized. Moreover, in a case of a multi carrier communication, the transmitter 100 is provided with the plurality of modulators 102 or inverse Fourier transform units. In a case of a spectrum spreading communication, the modulator 102 is provided with a spreading unit.

[0020]

The RF unit 104 transforms the transmission signal into radio frequency signal. A frequency transformation unit, a power amplifier, a frequency oscillator and so forth are included therein.

The antenna 132 of the transmitter 100 transmits the radio frequency signals. The antenna may have arbitrary directivity and the number of the antennas may also be arbitrary.

[0021]

The antennas 134 of the receiver 106 receive the radio

frequency signals. In this embodiment, the number of the antennas 134 is  $n$ . When it is described in this embodiment that the receiver has a  $n$ -th component thereof, it means that the number of the components provided to the receiver  
5 106 is same as the number of the antennas 134, where the first, second, ...  $n$ -th component basically performs same operation in parallel.

The RF unit 108 transforms the radio frequency signals into baseband received signals 300. A frequency oscillator  
10 and so forth are provided to the RF unit 108. In a case of the multi carrier communication, the RF unit 108 is provided with a Fourier transform unit. In a case of the spectrum spreading communication, the RF unit 108 is provided with a despreading unit.

15 [0022]

The signal processing unit 110 synthesizes the baseband received signals 330 with respectively weighting by the weighting coefficients and controls each weighting coefficient adaptively.

20 The demodulator 112 demodulates the synthesized signals and performs decision on the transmitted information signal. The demodulator 112 may also be provided with a delay detection circuit or a carrier recovery circuit for coherent detection.

25 [0023]

Fig. 2 and Fig. 3 show other burst formats



respectively utilized in different communication systems corresponding to the communication system shown in Fig. 1. Training signals and data signals included in the burst signals are also shown in those figures. Fig. 2 shows a  
5 burst format utilized in a traffic channel of the Personal Handyphone System. A preamble is placed in initial 4 symbols of the burst, which is utilized for timing synchronization. The signals of the preamble and a unique word can serve as a known signal for the signal processing  
10 unit 110, therefore the signal processing unit 110 can utilize the preamble and the unique word as the training signal. Data and CRC both following after the preamble and the unique word are unknown for the signal processing unit 110 and correspond to the data signal.

15 [0024]

Fig. 3 shows a burst format utilized in a traffic channel of the IEEE 802.11a, which is one type of wireless LAN (Local Area Network). The IEEE 802.11a employs OFDM (Orthogonal Frequency Division Multiplexing) modulation  
20 scheme. In the OFDM modulation scheme, the size of the Fourier transform and the number of the symbols of the guard interval are summated and the summation forms a unit. It is to be noted that this one unit is described as an OFDM symbol in this embodiment. A preamble is placed in initial  
25 4 OFDM symbols of the burst, which is mainly utilized for timing synchronization and carrier recovery. The signals of

the preamble can serve as a known signal for the signal processing unit 110, therefore the signal processing unit 110 can utilize the preamble as the training signal. Header and Data both following after the preamble are unknown for the signal processing unit 110 and correspond to the data signal.

[0025]

Fig. 4 shows a structure of the receiver 106 shown in Fig. 1. The RF unit 108 includes a first pre-processing unit 114a, a second pre-processing unit 114b, ... and a n-th pre-processing unit 114n, which are generically named pre-processing units 114. The signal processing unit 110 includes: a first BB input unit 116a, a second BB input unit 116b, ... and a n-th BB input unit 116n which are generically named BB input units 116; a synthesizing unit 118; a first weight computation unit 120a, a second weight computation unit 120b, ... and a n-th weight computation unit 120n which are generically named weight computation units 120; a rising edge detection unit 122; a control unit 124; a training signal memory 126; an antenna determination unit 10; an initial weight data setting unit 12; a gap measuring unit 14, a gap compensating unit 16; a weight switching unit 18. The demodulator 112 includes a synchronous detection unit 20, a decision unit 128 and a summing unit 130.

[0026]

Moreover the signals utilized in the receiver 106 include: a first baseband received signal 300a, a second baseband received signal 300b, ... and n-th baseband received signal 300n which are generically named the baseband received signals 300; a training signal 302; a control signal 306; an error signal 308; a first control weighting coefficient 310a, a second control weighting coefficient 310b, ... and a n-th control weighting coefficient 310n which are generically named control weighting coefficients 310; an antenna selection signal 314; a gap error signal 316; a first updated weighting coefficient 318a, a second updated weighting coefficient 318b, ... and a n-th updated weighting coefficient 318n which are generically named updated weighting coefficients 318; a first initial weighting coefficient 320a, a second initial weighting coefficient 320b, ... and a n-th initial weighting coefficient 320n which are generically named initial weighting coefficients 320; and a first weighting coefficient 322a, a second weighting coefficient 322b, ... and a n-th weighting coefficient 322n which are generically named weighting coefficients 322.

[0027]

The pre-processing units 114 translates the radio frequency signals into the baseband received signals 300.

The rising edge detection unit 122 detects the starts of the burst signals which serve as a trigger of the

operation of the signal processing unit 110 from the baseband received signals 300. The timings of the detected starts of the burst signals are informed to the control unit 124. The control unit 124 computes timings when the  
5 interval of the training signal 302 ends, based on the timings of the starts of the burst signals. These timings are notified to each unit as control signals 306 in accordance with necessity.

[0028]

10 The antenna determination unit 10 measures the electric power of each baseband received signal 300 after the interval of the training signal 302 is started in order to select one antenna 134 to be made effective in the interval of the training signal 302 and then determines the  
15 one baseband received signal 300 of which the electric power becomes is largest. Moreover, the antenna determination unit 10 outputs this information as the antenna selection signal 314.

[0029]

20 The initial weight data setting unit 12 sets the weighting coefficients 322 utilized in the interval of the training signal 302 as the initial weighting coefficients 320. The initial weight data setting unit 12 makes only one initial weighting coefficient 302 effective by setting the  
25 value of the one initial weighting coefficient 320 as 1 and by setting the values of the other weighting coefficients

320 as 0. The one initial weighting coefficient 320 to be made effective is decided according to the antenna selection signal 314.

[0030]

5           The training signal memory 126 stores the training signal 302 and outputs the training signal in accordance with necessity.

          The weight computation unit 120 updates the control weighting coefficients 310 based on the baseband received  
10 signals 300 and after-mentioned error signal 308 by the LMS algorithm.

[0031]

          The gap measuring unit 14, based on the baseband received signals 300 and the training signal 302, estimates  
15 the gap between the results of a synthesis processing performed in the after-mentioned synthesizing unit 118, wherein one result is acquired by performing the synthesizing processing on the initial weighting coefficients 320 and baseband received signals 300 and the  
20 other is acquired by performing the synthesizing processing on the control weighting coefficients 310 and the baseband received signals 300. The synthesis result acquired by utilizing the initial weighting coefficients 320 is the baseband received signal 300 as it is, which is  
25 corresponding to one antenna 134. Therefore following expression (1) can be acquired. Here, it is presumed that

the one antenna 134 is an  $i$ -th antenna 134.

[Expression 1]

$$x_i(t) = h_i S(t) \exp(j \Delta \omega t) + n_i(t)$$

Here,  $h_i$  is the response characteristic of the radio  
 5 interval,  $S(t)$  is the transmission signal,  $\Delta \omega$  is the  
 frequency offset between the frequency oscillators of the  
 transmitter 100 and the receiver 106, and  $n_i(t)$  is a noise.  
 On the other hand, a control weighting coefficient 310 $w_i$   
 updated from the head region of the burst signal is given  
 10 by:

[Expression 2]

$$\sum h_i w_i = 1$$

Here, it is presumed assumed that the control  
 weighting coefficients have already converged sufficiently.

15 By performing the synthesis processing based on the  
 ground of the above-described expression (2), following  
 result of the synthesis processing can be acquired.

[Expression 3]

$$y(t) = S(t) \exp(j \Delta \omega t) + n(t)$$

20 By comparing the synthesis results shown in (1) and  
 (3), a gap error signal 316C is given by:

[Expression 4]

$$C=h_i$$

The gap compensating unit 16 compensates the control weighting coefficients 310 with the gap error signal 316 and outputs the result of the compensation as the updated  
 5 weighting coefficients 318.

[0032]

The weight switching unit 18, based on the instruction of the control signal 306, selects the initial weighting coefficients 320 in the interval of the training signal 302  
 10 and selects the updated weighting coefficients 318 in the interval of the data signal. Then, the weight switching unit 18 outputs them as the weighting coefficients 322.

The synthesizing unit 118 weights the baseband received signals 300 with the weighting coefficients 322 and  
 15 then sums them up.

[0033]

The synchronous detection unit 20 performs synchronous detection on the synthesized signals and also performs a carrier recovery necessary for the synchronous detection.

20 The decision unit 128 decides the transmitted information signal by comparing the signal acquired by the summation to a pre-determined threshold value. The decision may be either hard or soft.

The summing unit 130 generates the error signal 308  
 25 based on the difference value between the synchronous

detected signal and the decided signal, which is to be utilized in the LMS algorithm in the weight computation units 120. In an ideal situation, the error signal becomes zero since the LMS algorithm controls the weighting  
5 coefficients 310 so that the error signal 308 might become small.

[0034]

Fig. 5 to Fig. 7 show various structures of the first pre-processing unit 114a. The first pre-processing unit  
10 114a in the receiver 106 can accept and treat various signals in different communication systems such as shown in Fig. 2 or Fig. 3, therefore the signal processing unit 110 following thereafter can operate ignoring the difference of the communication systems. The first pre-processing unit  
15 114a in Fig. 5 is for the single carrier communication system shown in Fig. 2 such as Personal Handyphone System, cellular phone system or the like. The first pre-processing unit 114a in Fig. 5 includes a frequency translation unit 136, a quasi synchronous detector 138, an AGC (Automatic  
20 Gain Control) 140, an AD conversion unit 142, and a timing detection unit 144. The first pre-processing unit 114a shown in Fig. 6 is for the spectrum spreading communication system such as the W-CDMA (Wideband-Code Division Multiple Access) or the wireless LAN implemented in relation to the  
25 IEEE 802.11b. In addition to the first pre-processing unit 114a shown in Fig. 5, that shown in Fig. 6 further includes



a despreading unit 172. The first pre-processing unit 114a is for the multi carrier communication system shown in Fig. 3 such as the IEEE 802.11a or the Hiper LAN/2. In addition to the first pre-processing unit 114a shown in Fig. 6, that  
5 shown in Fig. 7 further includes a Fourier transform unit 174.

[0035]

The frequency translation unit 136 translates the radio frequency signal into one intermediate frequency  
10 signal, a plurality of intermediate frequency signals or other signals.

The quasi synchronous detector 138 performs quadrature detection on the intermediate frequency signal utilizing a frequency oscillator and generates a baseband analog signal.  
15 Since the frequency oscillator included in the quasi synchronous detector 138 operates independently from the frequency oscillator provided to the transmitter 100, the frequencies between the two oscillators differ from each other.

20 [0036]

The AGC 140 automatically controls gains so that the amplitude of the baseband analog signal might become an amplitude within the dynamic range of the AD conversion unit 142.

25 The AD conversion unit 142 converts the baseband analog signal into a digital signal. Sampling interval for

converting the baseband analog signal to the digital signal is generally set to be shorter than symbol interval in order to constrict the degradation of the signal. Here, the sampling interval is set to the half of the symbol interval  
 5 (Hereinafter, the signal digitalized with this sampling interval is referred to as a "high speed digital signal").

[0037]

The timing detection unit 144 selects a baseband received signal 300 of an optimal sampling timing from the  
 10 high speed digital signals. Alternatively, the timing detection unit 144 generates the baseband received signal 300 having the optimal sampling timing by performing a synthesis processing or the like on the high speed digital signals.

15 The despreading unit 172 shown in Fig. 6 performs correlation processing on the baseband received signal 300 based on a predetermined code series. The Fourier transform unit 174 in Fig. 7 performs the Fourier transform on the baseband received signal 300.

20 [0038]

Fig. 8 shows the structure of the timing detection unit 144. The timing detection unit 144 includes: a first delay unit 146a, a second delay unit 146b, ... and a (n-1)-th delay unit 146n-1 which are generically named delay units  
 25 146; a first multiplication unit 150a, a second multiplication unit 150b, a (n-1)-th multiplication unit

150n-1, ... and a n-th multiplication unit 150n which are  
generically named multiplication units 150; a first data  
memory 152a, a second data memory 152b, a (n-1)-th data  
memory 152n-1, ... a n-th data memory 152n which are  
5 generically named data memories 152; a summing unit 154; a  
decision unit 156; a main signal delay unit 158; and a  
selecting unit 160.

[0039]

The delay units 146 delay the inputted high speed  
10 digital signal for the correlation processing. The sampling  
interval of the high speed digital signal is set to half of  
the symbol interval. However the delay quantity of the  
delay units 146 is set to the symbol interval, therefore the  
high speed digital signal 150 is outputted from every other  
15 delay unit 146 to the multiplication units 150.

The data memories 152 store 1 symbol of each preamble  
signal for the timing synchronism.

The multiplication units 150 perform multiplications  
on the high speed digital signals and the preamble signals,  
20 and the results thereof are summed up by the summing unit  
154.

[0040]

The decision unit 156 selects an optimal sampling  
timing based on the result of the summation. The sampling  
25 interval of the high speed digital signal is half of the  
symbol signal and the interval of the high speed digital

signal utilized for the summation is equal to the symbol interval, therefore there are two types of the summation results for every other high speed digital signal corresponding to each shifted sampling timing. The decision unit 156 compares the two types of the summation results and decides a timing corresponding to larger summation result as the optimal sampling timing. This decision should not necessarily be made by comparing the two types of the summation results once, but may be made by comparing them for several times.

[0041]

The main signal delay unit 158 delays the high speed digital signal until the optimal sampling timing is determined by the decision unit 156.

The selecting unit 160 selects a baseband received signal 300 corresponding to the optimal sampling timing from the high speed digital signals. Here one high speed digital signal is selected sequentially from the two successive high digital speed signals.

[0042]

Fig. 9 shows the structure of the rising edge detection unit 122 included in the signal processing unit 110. The rising edge detection unit 122 includes a power computation unit 162 and a decision unit 164. The power computation unit 162 computes the received power of each baseband received signal 300 and then sums up the received

power of each baseband received signal to acquire the whole power of the signals which are received by all the antennas 134.

The decision unit 164 compares the whole received  
 5 power of the signals with a predetermined condition and decides that the start of the burst signal is detected when the condition is satisfied.

[0043]

Fig. 10 shows the operation of the rising edge  
 10 detection unit 122. The decision unit 164 sets an internal counter T to zero (S10). The power computation unit 162 computes the received power from the baseband received signals 300 (S12). The determination unit 164 compares the received power with a threshold value. When the received  
 15 power is larger than the threshold value (Y in S14), the decision unit 164 adds 1 to the T (S16). When the T becomes larger than a predetermined value  $\tau$  (Y in S18), it is decided that the start of the burst signal is detected. The processing described-above is repeated until the start of  
 20 the burst signal is detected (N in S14, N in S18).

[0044]

Fig. 11 shows the structure of the antenna  
 determination unit 10. The antenna determination unit 10 includes: a first level measuring unit 22a, a second level  
 25 measuring unit 22b, ... and a n-th level measuring unit 22n which are generically called level measuring units 22; and a

selecting unit 24.

The level measuring units 22 detect the start timing of the burst signal based on the control signal 306 and measure the electric power of each baseband received signal 300 during prescribed interval from the start timing.

[0045]

The selecting unit 24 selects the baseband received signal 300 which has the largest electric power by comparing the electric power of each baseband received signal 300 and then outputs a result as the antenna selection signal 314.

Fig. 12 shows the structure of the first weight computation unit 120a. The first weight computation unit 120a includes a switching unit 48, a complex conjugate unit 50, a main signal delay unit 52, a multiplication unit 54, a step size parameter memory 56, a multiplication unit 58, a summing unit 60, and a delay unit 62.

[0046]

The switching unit 48 selects the training signal 302 in the interval of the training signals 302 by detecting the start timing of the burst signal and the end timing of interval of the training signal 302 based on the control signal 306 and then selects the error signal 308 in the interval of the data signal.

The main signal delay unit 52 delays the first baseband received signal 300a so that the first baseband received signal 300a might synchronize with the timing

detected by the rising edge detection unit 122.

[0047]

The multiplication unit 54 generates a first multiplication result by multiplying the phase error 308 after complex conjugate transform in the complex conjugate unit 50 by the first baseband received signal 300a which is delayed by the main signal delay unit 52.

The multiplication unit 58 generates a second multiplication result by multiplying the first multiplication result by a step size parameter stored in the step size parameter memory 56. The second multiplication result is fed back by the delay unit 62 and the summing unit 60 and added to a new second multiplication result. The result of the summation is then sequentially updated by the LMS algorithm. This summation result is outputted as the first weighting coefficient 310a.

[0048]

Fig. 13 shows the structure of the gap measuring unit 14. The gap measuring unit 14 includes a complex conjugate unit 44, a selecting unit 64, a buffer unit 66 and a multiplication unit 68.

The selecting unit 64, based on the antenna selection signal 314, selects the baseband received signal 300 corresponding to the one initial weighting coefficient 320 which has been made effective in the interval of the training signal 302.

[0049]

The buffer unit 66 detects the start timing of the burst signal based on the control signal 306 and outputs the baseband received signal 300 at the start timing.

5        The multiplication unit 68 multiplies the training signal 302 after the complex conjugate processing in the complex conjugate unit 44 by the one baseband received signal 300 outputted from the buffer unit 66 and then outputs the gap error signal 316. Here, it is presumed that  
10 both the training signal 302 and baseband received signal 300 are the head signal of the burst signal.

[0050]

Fig. 14 shows the structure of the gap compensating unit 16. The gap compensating unit 16 includes a first  
15 multiplication unit 70a, a second multiplication unit 70b, ... and a n-th multiplication unit 70n which are generically named multiplication units 70.

The multiplication units 70 detect the end timing of the interval of the training signal 302 based on the control  
20 signal 306. Then the multiplication units 70 multiply the control weighting coefficients 310 by the gap error signal 316 and outputs the updated weighting coefficients 318.

[0051]

Fig. 15 shows the structure of the synthesizing unit  
25 118 which is included in the signal processing unit 110. The synthesizing unit 118 includes: a first delay unit 166a,



a second delay unit 166b, ... and a n-th delay unit 166n which are generically named delay units 166; a first multiplication unit 168a, a second multiplication unit 168b, ... and a n-th multiplication unit 168n which are  
 5 generically named multiplication units 168; and a summing unit 170.

[0052]

Since the delay time of the delay units 166 is from the detection of the head of the burst signal by the rising  
 10 edge detection unit 122 until setting the weighting coefficients 322 by the initial weight data setting unit 12 via the weight switching unit 18, the processing delay of the delay units 166 can be ignored in general. Therefore, synthesizing processing with less processing delay can be  
 15 realized.

[0053]

The multiplication units 168 multiply the baseband received signals 300 which are delayed by the delay units 166 by the weighting coefficients 322. The summing unit 170  
 20 sums up the whole results of the multiplications by the multiplications units 168.

Hereunder will be described the operation of the receiver 106 having the structure described above. The signals received by the plurality of antennas 134 are  
 25 translated to the baseband received signals 300 by the quadrature detection and so forth. When the rising edge

detection unit 122 detects the starts of the burst signals from the baseband received signals 300, the interval of the training signal 302 is started. At the start timing of the interval of the training signal 302, the antenna

5 determination unit 10 selects the one baseband received signal 300. Then the initial weight data setting unit 12 sets the initial weighting coefficients 320, where the only initial weighting coefficient 320 corresponding to the selected baseband received signal 300 is made effective.

10 [0054]

In the interval of the training signal 302, the weight switching unit 18 outputs the initial weighting coefficients 320 as the weighting coefficients 322 and the synthesizing unit 118 sums up the baseband received signals 300 weighting  
15 them with the weighting coefficients 322. Meanwhile, the weight computation units 120 update the control weighting coefficients 310 by the LMS algorithm. In the interval of the data signal, the gap compensating unit 16 compensates the control weighting coefficients 310 with the gap error  
20 signal 316 computed in the gap measuring unit 14 and then outputs them as the updated weighting coefficients 318.

Moreover, the weight switching unit 18 outputs the updated weighting coefficients 318 as the weighting coefficients 322 and the synthesizing unit 118 weights the baseband received  
25 signals 300 with the weighting coefficients 322 and sums them up.

[0055]

According to the first embodiment, the processing delay can be reduced since the synthesizing processing is performed even in the interval of the training signal regardless of the convergence of the weighting coefficients. Moreover, communications with surrounding radio stations located in the vicinity can be realized since the omni antenna pattern is utilized for the weighting coefficients in the interval of the training signal. The weighting coefficients can be smoothly switched between the omni antenna pattern and the adaptive array antenna pattern.

[0056]

#### Second Embodiment

In the second embodiment, same as the first embodiment, received signals are weighted with weighting coefficients and synthesized. The processing delay hardly occurs since the switching is performed between the omni antenna pattern which is precedently prepared and the adaptive array pattern updated by the LMS algorithm. In the first embodiment, the switching of the weighting coefficients between two types is performed in an undifferentiated manner at the timing where the training signal included in the burst signal ends. On the other hand, in the second embodiment, the switching of weighting coefficients between two types is performed adaptively at the timing where the LMS algorithm converges within a predetermined range.

[0057]

Fig. 16 shows the structure of the receiver 106 according to the second embodiment. The structure thereof is almost same as the structure of the receiver 106 shown in Fig. 4. However, the receiver 106 shown in Fig. 16 includes a first convergence information 324a, a second convergence information 324b, ... and a n-th convergence information 324n which are generically named convergence information 324.

[0058]

10       The weight switching unit 18 shown in Fig. 4 performs the switching operation in a manner that the initial weighting coefficient 320 is selected in the interval of the training signal 302 and the updated weighting coefficient is selected in the interval of the data signal, wherein the end  
15       timing of the interval of the initial weighting coefficients 320 serves as a trigger for the weight switching unit 18. On the other hand, the weight switching unit 18 utilizes the timing where the control weighting coefficients 310 converge in the weight computation units 120 (hereinafter this timing  
20       is referred to as a "convergence timing"). The convergence timing is generated by the control unit 124 when the fluctuation of the control weighting coefficients 310 caused by updating them converges within in a range, wherein the range is determined precedently. Alternatively, the  
25       convergence timing may be generated by the control unit 124 when the updated error signal 308 becomes within a range,

wherein the range is predetermined for the error signal 308.

[0059]

The control unit 124 notifies the convergence timing to each unit in accordance with the necessity, and each unit  
5 performs its assigned processing according to the convergence timing.

Fig. 17 shows the structure of the antenna determination unit 10. The antenna determination unit 10 includes a switching unit 72, a level measuring unit 74, a  
10 storage 76 and a selecting unit 24.

[0060]

The switching unit 72 switches the plurality of baseband received signals 300 at a prescribed timing and outputs one baseband received signal 300. The switching may  
15 be performed on the plurality of burst signals.

The level measuring unit 74 measures the electric power of the baseband received signal 300 selected by the switching unit 72. Being different from the antenna determination unit 10 shown in Fig. 11, the electric power  
20 of the plurality of baseband received signals 300 is not measured at a time but measured for every baseband received signal 300 one by one, therefore the size of an arithmetic circuit for the level measuring unit 74 can be diminished.

The storage 76 stores the computed electric power of  
25 the baseband received signal 300.

[0061]

Fig. 18 shows the structure of the gap measuring unit 14. The gap measuring unit 14 shown in Fig. 18 is structured by adding a frequency error estimation unit 78, an interval measuring unit 80, a multiplication unit 82, a complex number transformation unit 84, a complex conjugate unit 86 and a multiplication unit 88 to the gap measuring unit 14 shown in Fig. 13.

[0062]

In the second embodiment, being different from the first embodiment, the timing where the weight computation units 120 start updating the control weight coefficients 310 is the head of the long preamble of the burst format shown in Fig. 3. The control weighting coefficient 310<sub>wi</sub> updated from the head of the long preamble is given by the expression (5) below. Here, it is presumed that the control weighting coefficients 310 have converged sufficiently.

[Expression 5]

$$\sum h_i w_i \exp(j \Delta \omega s T) = 1$$

Here, sT is the time length of a short preamble interval. By performing the synthesizing processing based on the expression (5), the synthesis result is given by:

[Expression 6]

$$y(t) = S(t) \exp(j \Delta \omega t) \exp(-j \Delta \omega s T) + n(t)$$

By comparing these expressions, the gap error signal 316C can be expressed as follows.

[Expression 7]

$$C = h_i \exp(-j \Delta \omega sT)$$

5           The frequency error estimation unit 78 estimates a frequency error  $\Delta\omega$  based on the baseband received signals 300. The interval measuring unit 80 measures the time  $sT$  of the short preamble interval based on the training signal 302.

[0063]

10           The multiplication unit 82 multiplies the frequency error by the time of the short preamble interval and acquires the phase error in the interval of the short preamble. This phase error is transformed to a complex number by the complex number transformation unit 84 and a  
15 complex conjugate processing is performed thereon by the complex conjugate unit 86.

The multiplication unit 88 multiplies, by the above-described phase error, the result of the multiplication processing on the one baseband received signal 300 and the  
20 complex conjugated training signal 302, and then generates the gap error signal 316.

[0064]

Fig. 19 shows the structure of the frequency error estimation unit 78. The frequency error estimation unit 78  
25 includes: a first main signal delay unit 26a, a second main

signal delay unit 26b, ... and a n-th main signal delay unit  
 26n which are generically named main signal delay units 26;  
 a first multiplication unit 28a, a second multiplication  
 unit 28b, ... and a n-th multiplication unit 28n which are  
 5 generically named multiplication units 28; a first delay  
 unit 30a, a second delay unit 30b, ... and a n-th delay unit  
 30n which are generically named delay units 30; a first  
 complex conjugate unit 32a, a second complex conjugate unit  
 32b, ... and a n-th complex conjugate unit 32n which are  
 10 generically named complex conjugate units 32; a first  
 multiplication unit 34a, a second multiplication unit  
 34b, ... and a n-th multiplication unit 34n which are  
 generically named multiplication units 34; an averaging unit  
 36; a phase transformation unit 38; and a training signal  
 15 memory 42.

[0065]

The multiplication units 28 acquires a received signal  
 $Z_i(t)$  which does not include transmission signal component  
 by multiplying the baseband received signals 300 delayed in  
 20 the main signal delay units 26 by the training signal 302  
 after the complex conjugate transform. The received signal  
 $Z_i(t)$  is given by:

[Expression 8]



$$Z_i(t) = x_i(t) S^*(t) \\ = h_i \exp(j \Delta \omega t)$$

Here, it is assumed that a noise is sufficiently small and therefore the noise is ignored.

[0066]

5           The delay units 30 and the complex conjugate units 32 delay the  $Z_i(t)$  and then transform the  $Z_i(t)$  to the complex conjugate. The  $Z_i(t)$  transformed to the complex conjugate is multiplied by the original  $Z_i(t)$  in the multiplication units 34. The result  $A_i$  of the multiplication is given by:

10       [Expression 9]

$$A_i(t) = Z_i(t) Z_i^*(t-T) \\ = \exp(j \Delta \omega t)$$

Here, the delay time of the delay units 30 is set to the symbol interval  $T$ .

15       The averaging unit 36 averages the multiplication results corresponding to each antenna. The multiplication results of which the time is shifted may also be utilized.

[0067]

20       The phase transformation unit 38 transforms the averaged multiplication result  $A$  to a phase signal  $B$  by utilizing an arc tangent ROM.

[Expression 10]

$$B = \Delta \omega T$$

Fig. 20 shows the structure of a gap measuring unit 14 which is different from the gap measuring unit 14 shown in Fig. 18. The gap measuring unit 14 shown in Fig. 20 is structured by adding a counter unit 90, a multiplication unit 92, a complex number transformation unit 94, a summing unit 96, a summing unit 98 and a division unit 40 to the gap measuring unit 14 shown in Fig. 18. In the gap measuring unit 14 shown in Fig. 18, the multiplication of the baseband received signals 300 by the training signal 302 is performed only on the head signal of the burst signal. On the other hand, in the gap measuring unit 14 shown in Fig. 20, the multiplications are performed during prescribed time and the results thereof are averaged.

[0068]

The summing unit 98 sums up the results of the multiplications by the multiplications unit 96 during prescribed time interval (hereinafter referred to as "averaging time") in order to average the results of the multiplications of the baseband received signals 300 by the training signal 302.

The counter unit 90 counts up the symbol intervals in order to acquire the phase error corresponding to the averaging time based on the frequency error outputted from

the frequency error estimation unit 78. The multiplication unit 92 acquires the phase error corresponding to each counter value by respectively multiplying each counter value by the frequency error. The phase errors are transformed to  
5 complex numbers in the complex number transformation unit 94 and are summed up in the summing unit 96 within the averaging time.

The division unit 40 divides the results of the multiplications summed up by the summing unit 98 with the  
10 phase errors summed up by the summing unit 96. The succeeding processings are same as those of the gap measuring unit 14 shown in Fig. 18.

[0069]

Hereunder will be described the operation of the  
15 receiver 106 having the structure described above. The signals received by the plurality of antennas 134 are transformed to the baseband received signals 300 by the quadrature detection and so forth. When the rising edge detection unit 122 detects the start timings of the burst  
20 signals from the baseband received signals 300, the interval of the training signal 302 is started. At the start timing of the interval of the training signal 302, the antenna determination unit 10 selects the one baseband received signal 300 and the initial weight data setting unit 12 sets  
25 the initial weighting coefficients 320 among which only the one initial weighting coefficient 320 corresponding to the

selected baseband received signal 300 is made effective.

Thereafter, the weight switching unit 18 outputs the initial weighting coefficients 320 as the weighting coefficients 322 and the synthesizing unit 118 weights the baseband received  
5 signals 300 with the weighting coefficients 322 and sums them up.

[0070]

Meanwhile, the weight computation units 120 update the control weighting coefficients 310 by the LMS algorithm.

10 When the control weighting coefficients 310 converge within the prescribed range, the gap compensating unit 16 compensates the control weighting coefficients 310 with the gap error signal 316 computed in the gap measuring unit 14 according to the instruction from the control unit 124 and  
15 then outputs them as the updated weighting coefficients 318. Moreover, weight switching unit 18 outputs the updated weighting coefficients 318 as the weighting coefficients 322 and the synthesizing unit 118 weights the baseband received signals 300 with the weighting coefficients 322 and sums  
20 them up.

[0071]

According to the second embodiment, the synthesis processing is performed regardless of the convergence of the weighting coefficients even in the interval of the training  
25 signal. Therefore, the processing delay can be reduced. Moreover, in the case that the adaptive algorithm converges

during the training signal interval, the response characteristic can be improved by reflecting it to the weighting coefficients. This is because the switching of the weighting coefficients between two types is performed  
5 based on the convergence timing of the adaptive algorithm.

Although the present invention has been described by way of exemplary embodiments, it should be understood that many changes and substitutions may be made by those skilled in the art without departing from the scope of the present  
10 invention which is defined by the appended claims.

[0072]

In the embodiments, the initial weight data setting unit 12 sets the effective value for the initial weighting coefficient 320 for the one baseband received signal 300  
15 selected by the antenna determination unit 10, which has the largest electric power, and the unit 12 sets the value which is not effective for the other initial weighting coefficients 320. The initial weighting coefficients 320, however, do not necessarily need to be set based on the  
20 electric power. For example, one fixed initial weighting coefficient 320 may be set to the effective value and the other initial weighting coefficients 320 may be set to the value that is not effective. In that case, the antenna determination unit 10 becomes unnecessary.

25 [0073]

In the embodiments, the initial weight data setting

unit 12 sets the effective value for the initial weighting coefficient 320 for the one baseband received signal 300 selected by the antenna determination unit 10, which has the largest electric power, and the unit 12 sets the value which is not effective for the other initial weighting coefficients 320. It is, however, not necessarily required to set the weighting of the omni antenna pattern for the initial weighting coefficients 320. For example, the setting may be performed on the updated weighting coefficients 318 or the control weighting coefficients 310 which are utilized in the already received burst signal. When the fluctuation of the radio transmission environment is small, it is estimated that this setting will not cause a serious degradation of the response characteristic.

15 [0074]

In the embodiments, the weight computation units 120 utilize the LMS algorithm as the adaptive algorithm. However, another algorithm such as the RLS algorithm may be utilized. Moreover, the weighting coefficients may not be updated. That is, it is sufficient if the adaptive algorithm is selected in accordance with the estimated radio transmission environment, the size of arithmetic circuits or the like.

[0075]

25 In the first embodiment, the rising edge detection unit 122 computes the electric power of the baseband

received signals 300 and detects the rising edge of the burst signal based on the computation result. The rising edge of the burst signal may be, however, detected by implementing another structure. For example, the rising  
5 edge may be detected by a matched filter which is shown as the structure of the timing detection unit 144. That is, it is sufficient if the rising edge of the burst signal is detected accurately.

[0076]

10 In the first embodiment, the training signal interval is the time where the initial weighting coefficients 320 are changed into the weighting coefficients 322. However, the time does not need to be limited to the interval of the training signal. For example, the time may be shorter than  
15 the interval of the training signal. That is, the time can be set according to the length of the interval of the training signal and to the required estimation accuracy.

[0077]

In the second embodiment, the delay time of the delay  
20 units 30 which are included in the frequency error estimating unit 78 is set to 1 symbol. The delay time, however, is not limited to 1 symbol. For example, the delay time may be 2 symbols or may be symbols in the interval between the start and end of the training signal. That is,  
25 it is sufficient if an optimum delay time of the delay units 30 is decided in accordance with the stability of the

frequency oscillator and with the required accuracy of the frequency offset estimation.

[0078]

[Effect of the Invention]

5       The present invention enables to provide a receiver having simple arithmetic circuits, of which the processing delay is small. The present invention also enables to provide a receiver of which the response characteristic hardly degrades even in the case the weighting coefficients  
10   have not converged yet. Moreover, the present invention enables to provide a receiver which can switch a plural types of weighting coefficients.

[Brief Description of the Drawings]

15       Fig. 1 shows a structure of a communication system according to a first embodiment of the present invention.

      Fig. 2 shows a burst format according to the first embodiment of the present invention.

      Fig. 3 shows a burst format according to the first  
20   embodiment of the present invention.

      Fig. 4 shows a structure of a receiver according to the first embodiment of the present invention.

      Fig. 5 shows a structure of a first pre-processing unit shown in Fig. 4.

25       Fig. 6 shows a structure of the first pre-processing unit shown in Fig. 4.



Fig. 7 shows a structure of the first pre-processing unit shown in Fig. 4.

Fig. 8 shows a structure of a timing detection unit shown in Figs. 5, 6 and 7.

5 Fig. 9 shows a structure of a rising edge detection unit shown in Fig. 4.

Fig. 10 shows an operation procedure of the rising edge detection unit shown in Fig. 9.

10 Fig. 11 shows a structure of an antenna determination unit shown in Fig. 4.

Fig. 12 shows a structure of a first weight computation unit shown in Fig. 4.

Fig. 13 shows a structure of a gap measuring unit shown in Fig. 4.

15 Fig. 14 shows a structure of a gap compensating unit shown in Fig. 4.

Fig. 15 shows a structure of a synthesizing unit shown in Fig. 4.

20 Fig. 16 shows a structure of a receiver according to a second embodiment of the present invention.

Fig. 17 shows a structure of an antenna determination unit shown in Fig. 16.

Fig. 18 shows a structure of a gap measuring unit shown in Fig. 16.

25 Fig. 19 shows a structure of a frequency error estimation unit shown in Fig. 18.

Fig. 20 shows a structure of a gap measuring unit shown in Fig. 16.

[Description of the Symbols]

10 Antenna determination unit, 12 Initial Weight Data  
 5 Setting Unit, 14 Gap measuring unit, 16 Gap compensating  
 unit, 18 Weight switching unit, 20 Synchronous detection  
 unit, 100 Transmitter, 102 Modulator, 104 RF unit, 106  
 Receiver, 108 RF unit, 110 Signal processing unit, 112  
 Demodulator, 114 Pre-processing unit, 116 BB input unit  
 10 118 Synthesizing unit, 120 Weight computation unit, 122  
 Rising edge detecting unit, 124 Control unit, 126 Training  
 signal memory, 128 Decision unit, 130 Summing unit, 132  
 Antenna, 134 Antenna, 300 BB input unit, 302 Training signal,  
 306 Control signal, 308 Error signal, 310 Control weighting  
 15 coefficient, 314 Antenna selection signal, 316 Gap error  
 signal, 318 Updated weighting coefficient  
 320 Initial weighting coefficient  
 322 Weighting coefficient  
 324 Convergence information

[Name of the Document] Abstract

[Abstract]

[Problem]

To provide a receiver having adaptive ray antenna, of which the processing delay is small.

[Means for Solving the Problem]

BB input units 116 input baseband received signals 300. An initial weight data setting unit 12 sets weighting coefficients 322 to be utilized in the interval of a training signal 302 as initial weighting coefficients 320. A gap compensating unit 16 compensates control weighting coefficients 310 with a gap error signal 316 and outputs the updated weighting coefficients 318 acquired as a result of the compensation. A weight switching unit 18 selects the initial weighting coefficients 320 in the interval of the training signal 302 and selects the updated weighting coefficients 318 in the interval of the data signal 302. Then the weight switching unit 18 outputs the selected initial weighting coefficients 320 and updated weighting coefficients 318 as the weighting coefficients 322. A synthesizing unit 118 weights the baseband received signals 300 with the weighting coefficients 322 and then sums them up.

[Selected Figure] Fig. 4

FIG.1

1/18

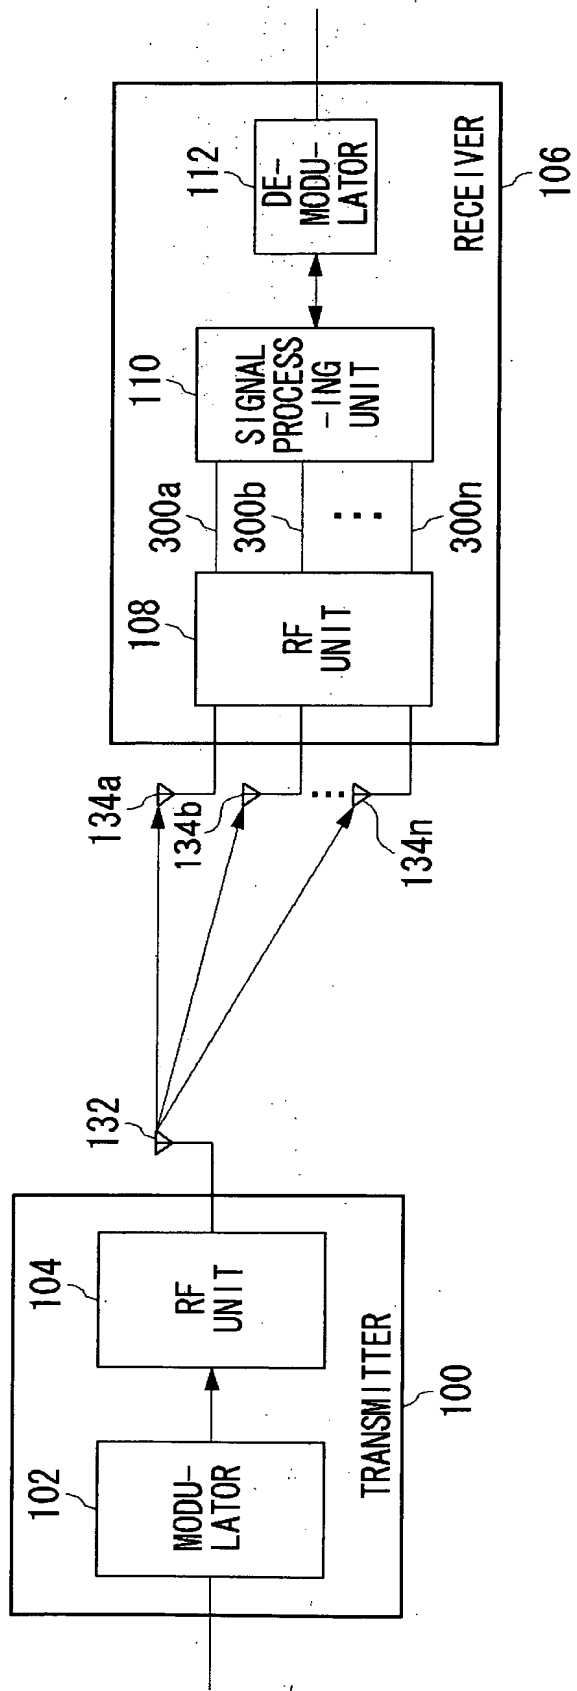


FIG.2

2/18

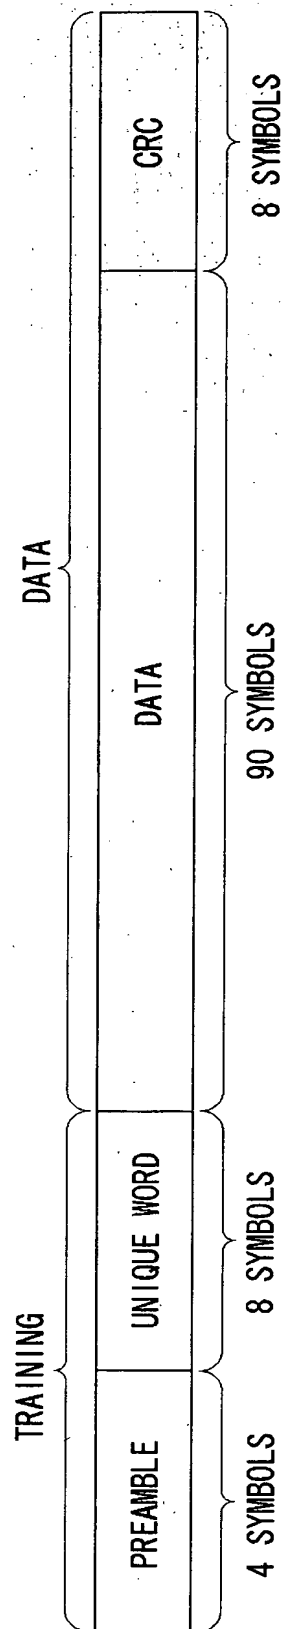


FIG.3

3/18

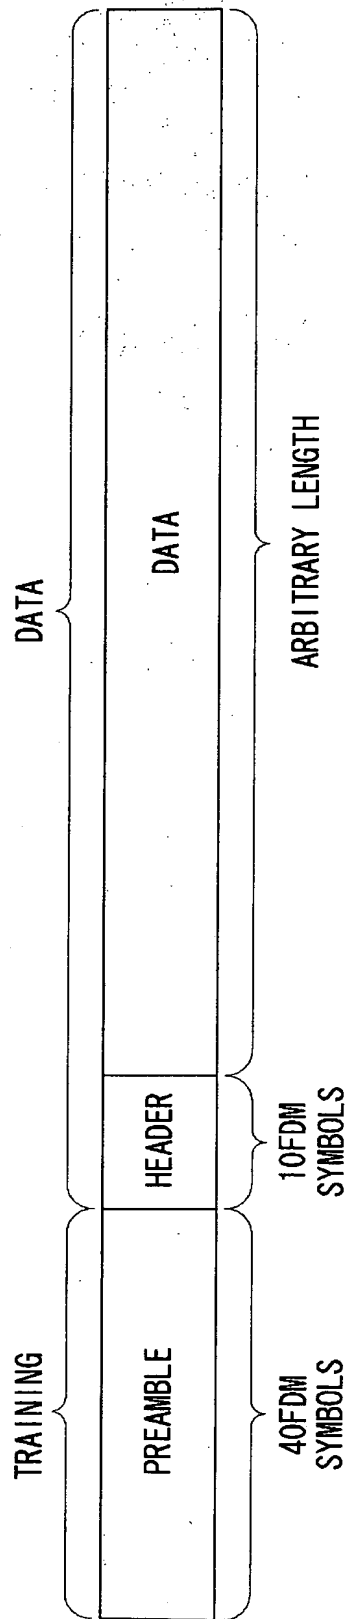


FIG. 4

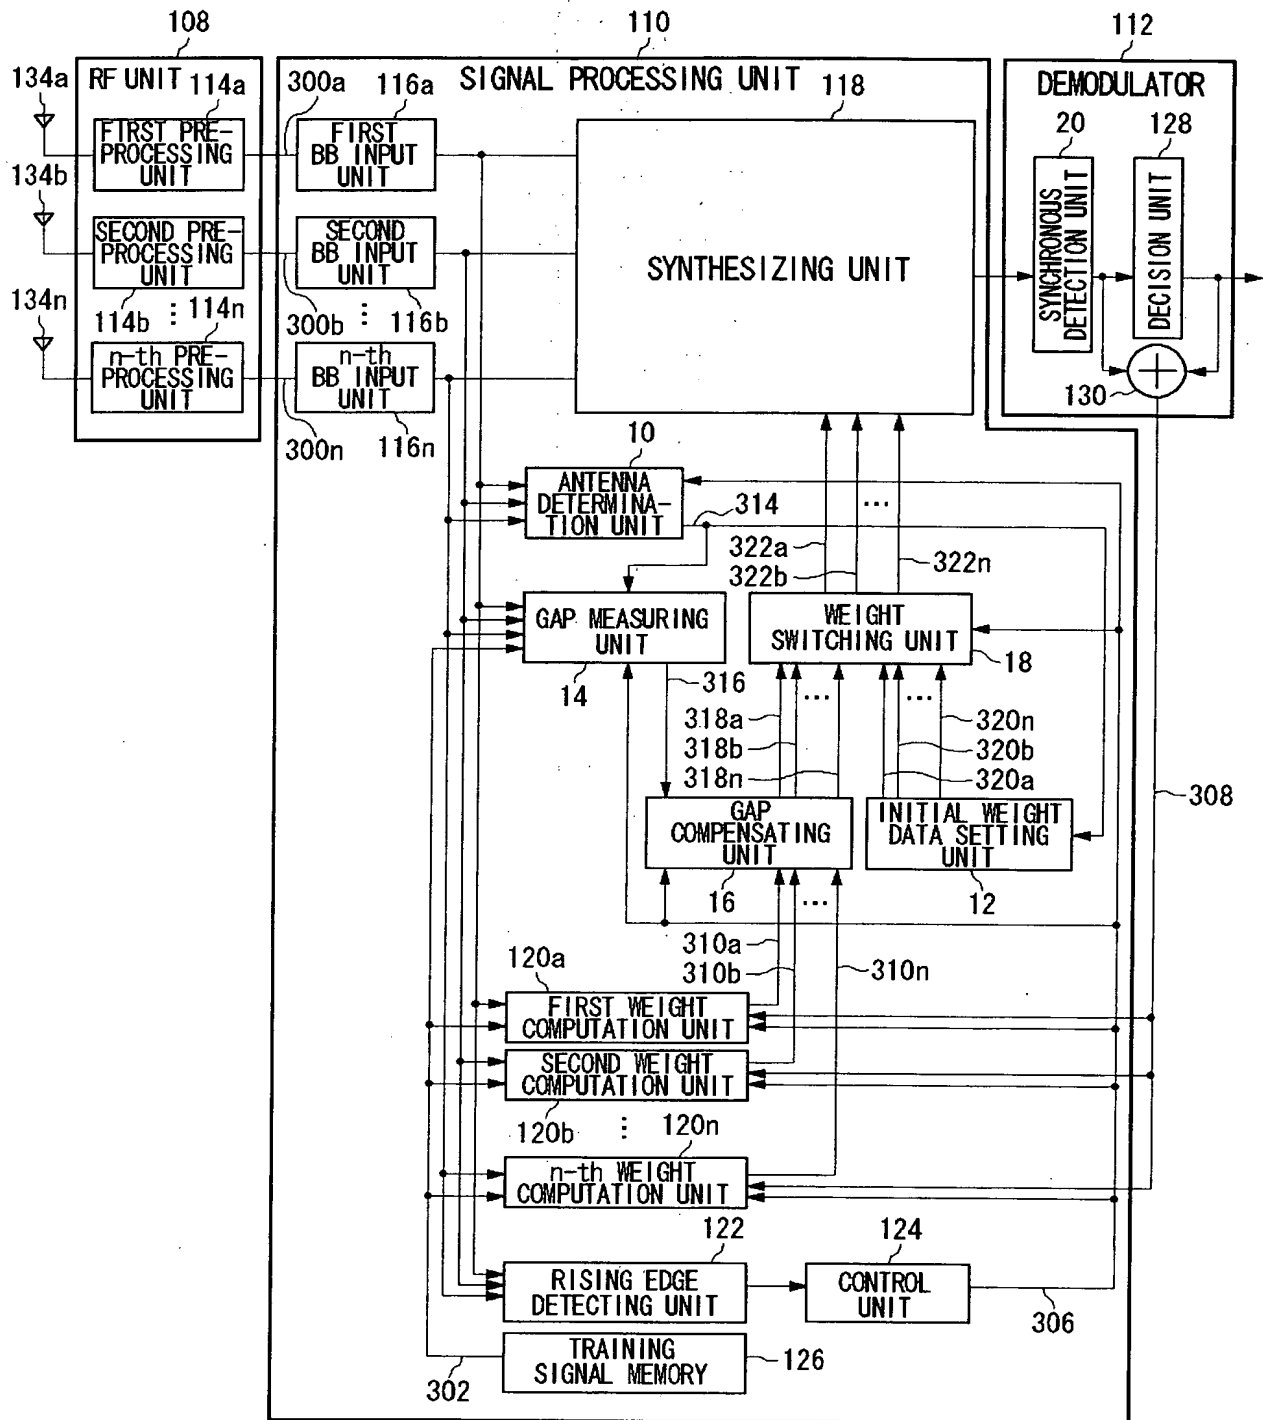


FIG.5

5/18

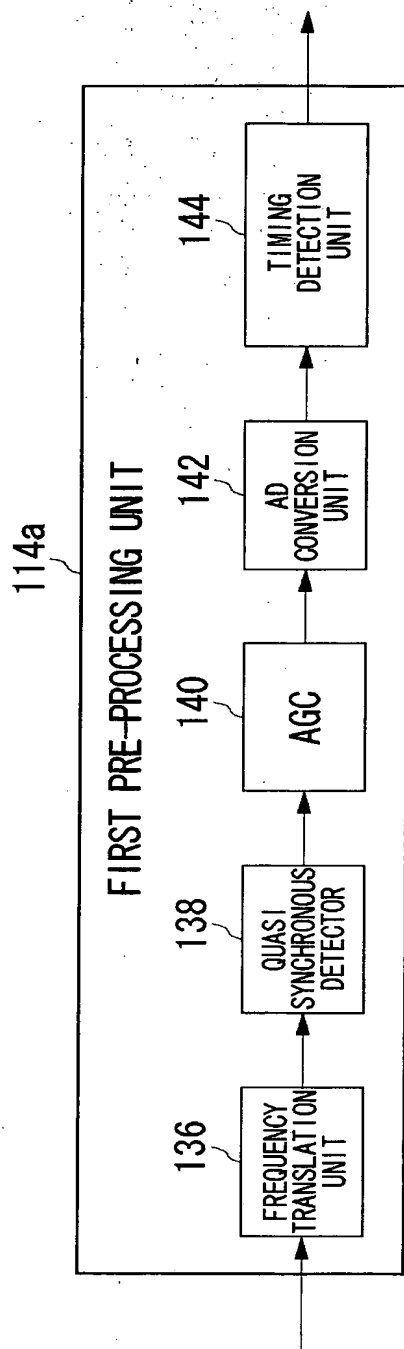




FIG.6

6/18

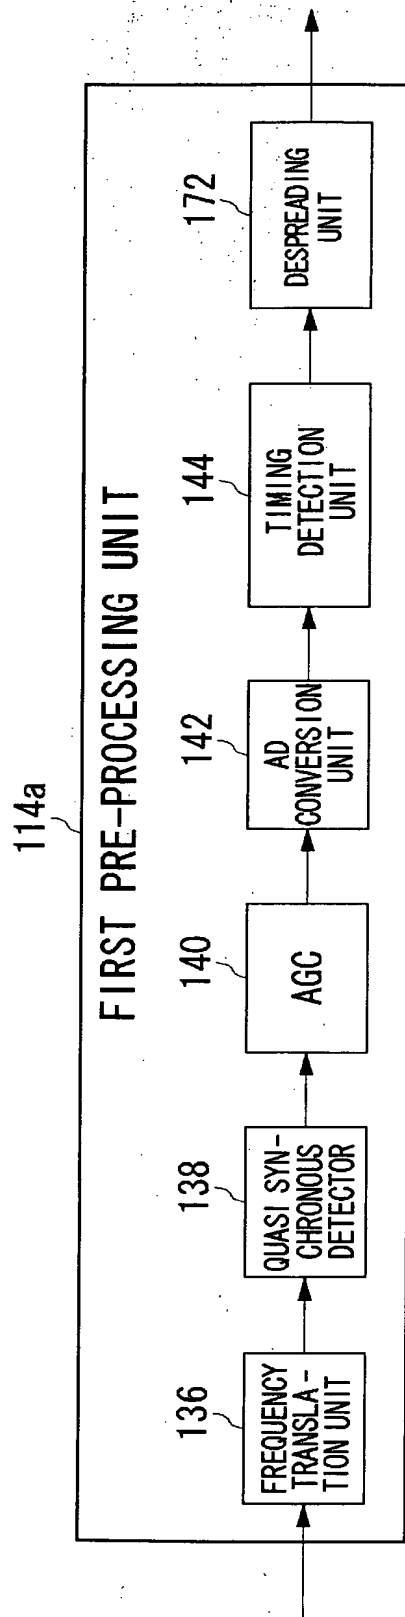


FIG.7

7/18

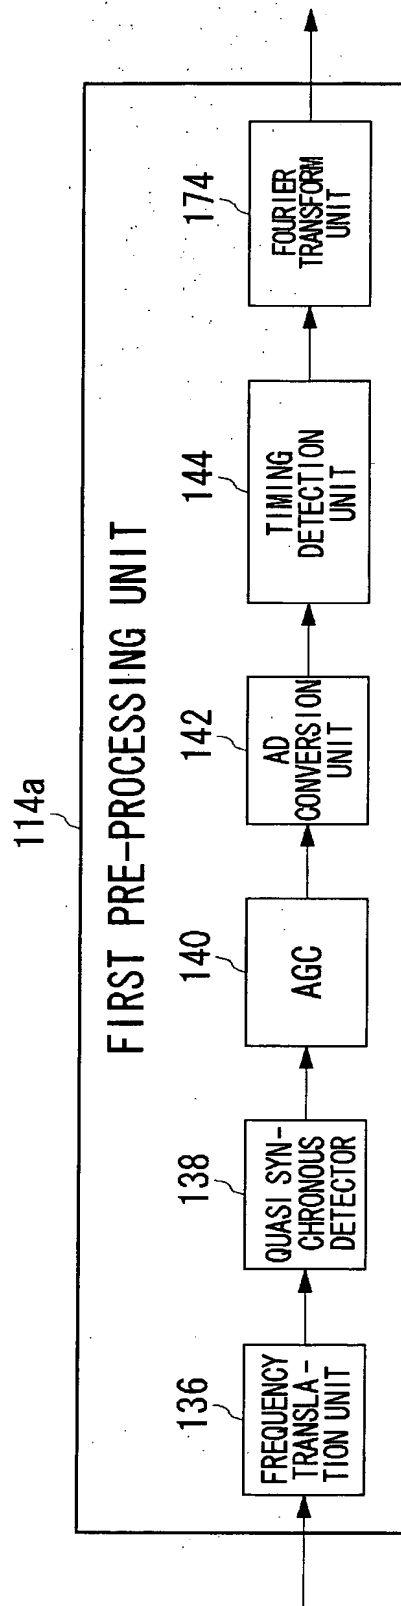


FIG. 8

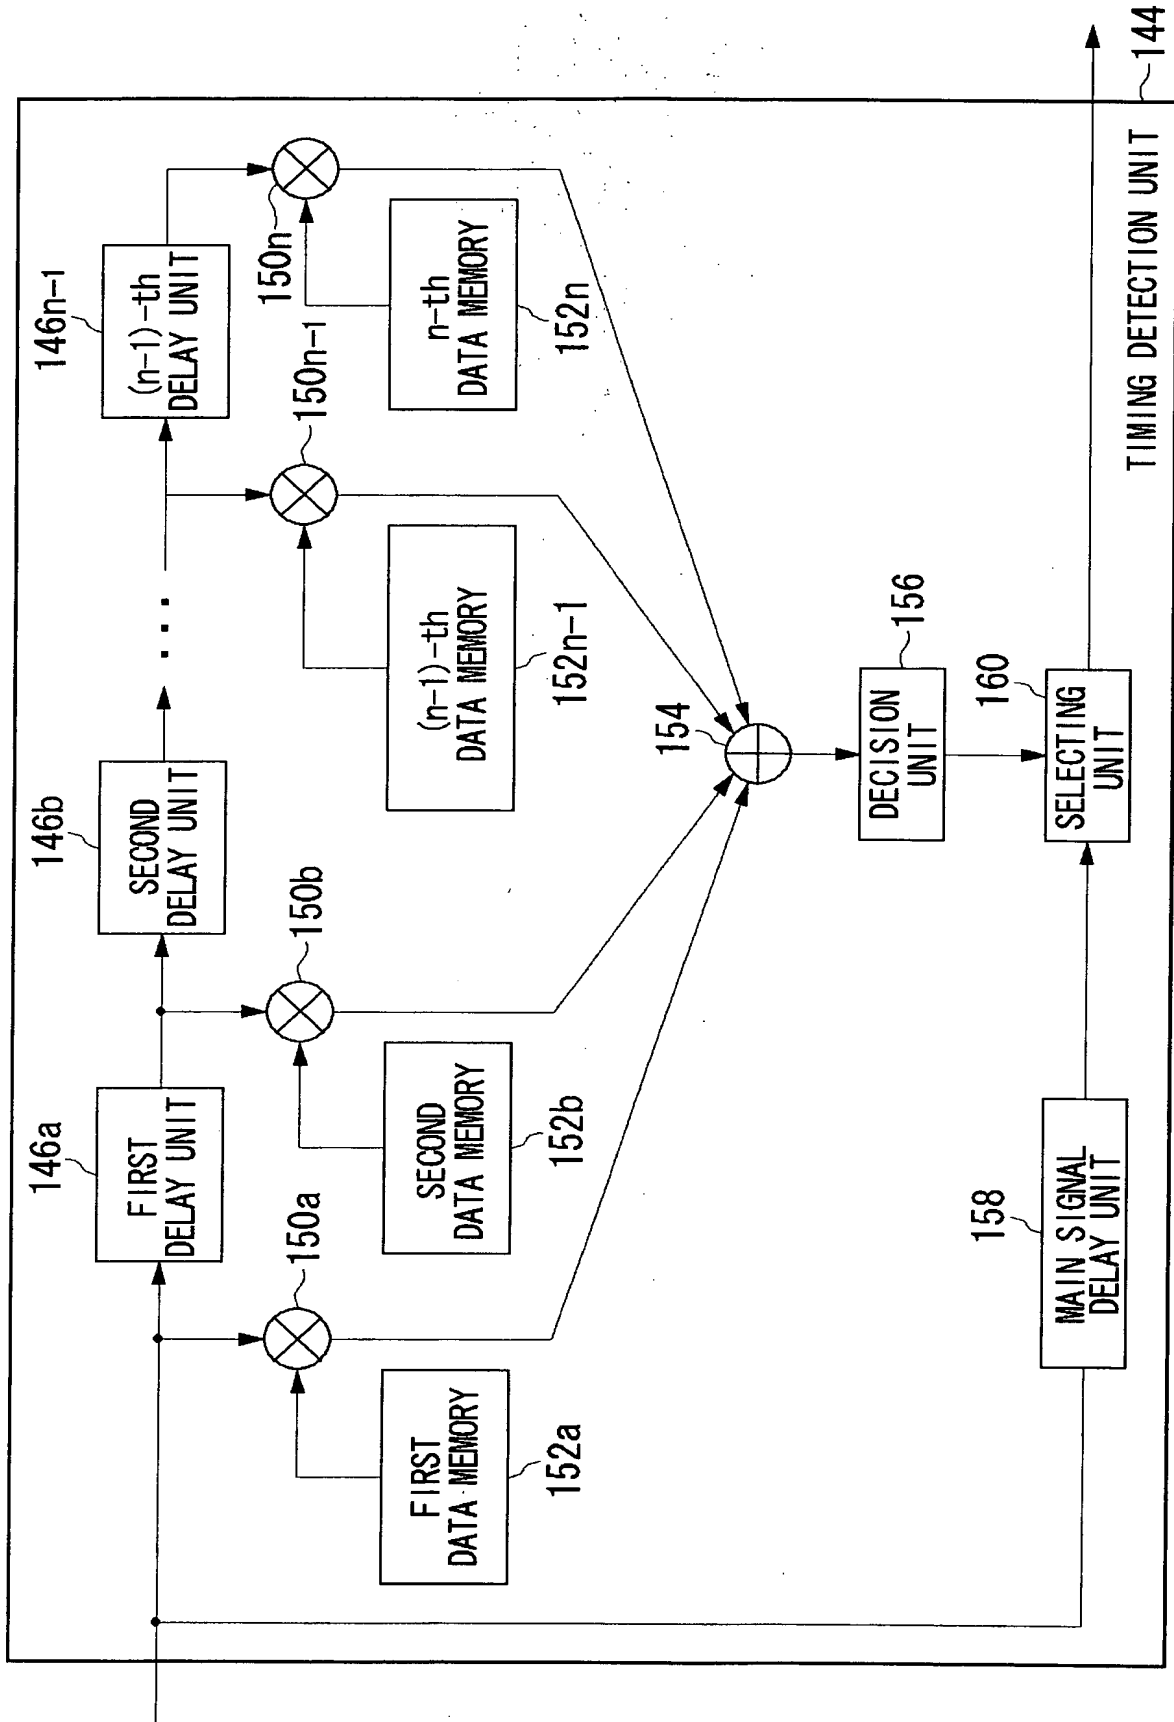


FIG. 9

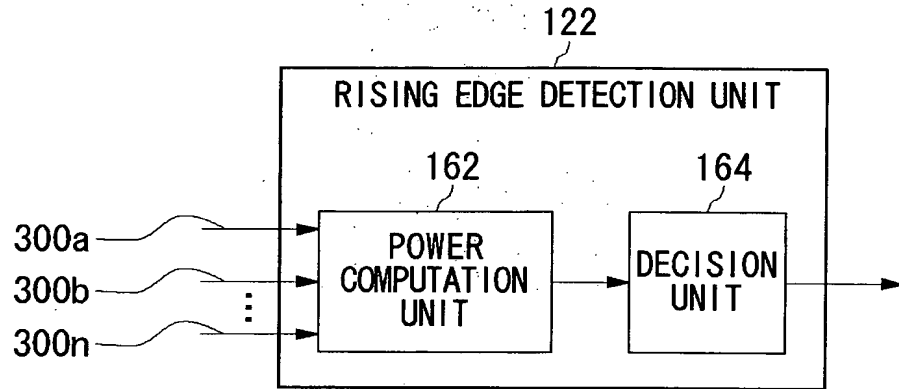


FIG.10

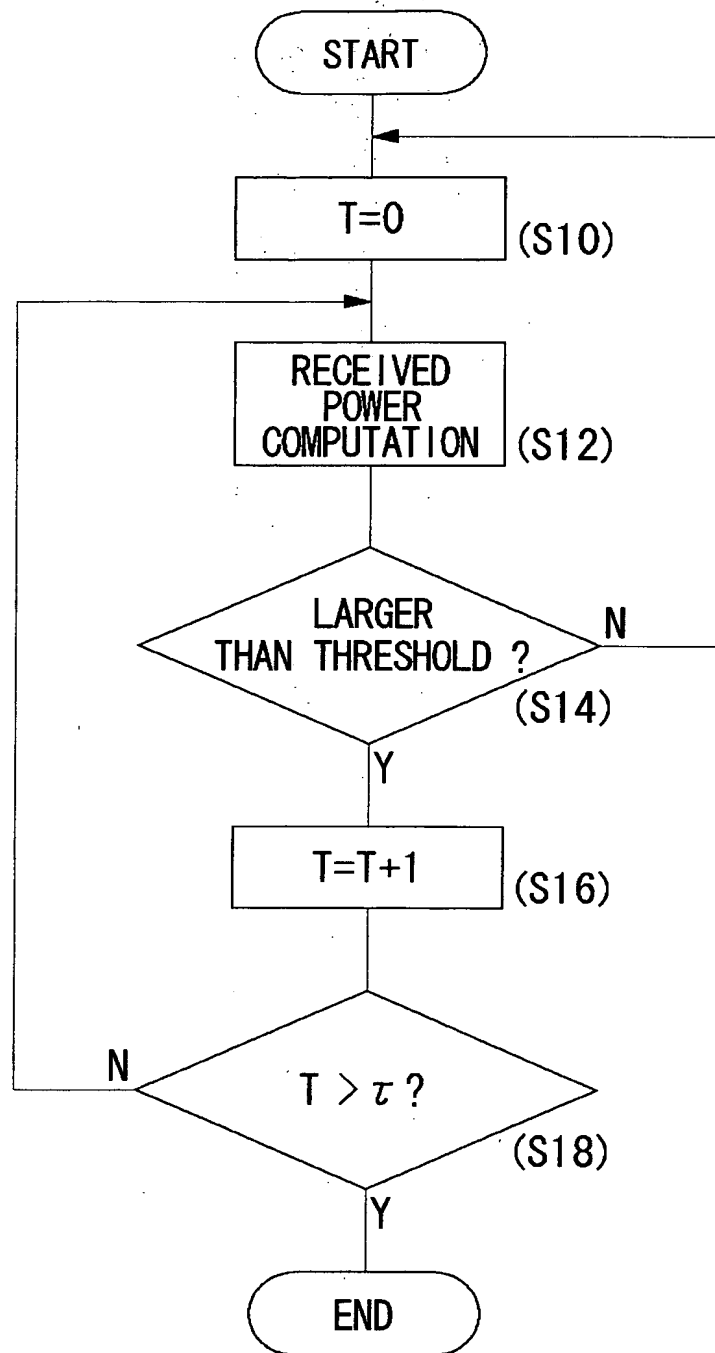


FIG.11

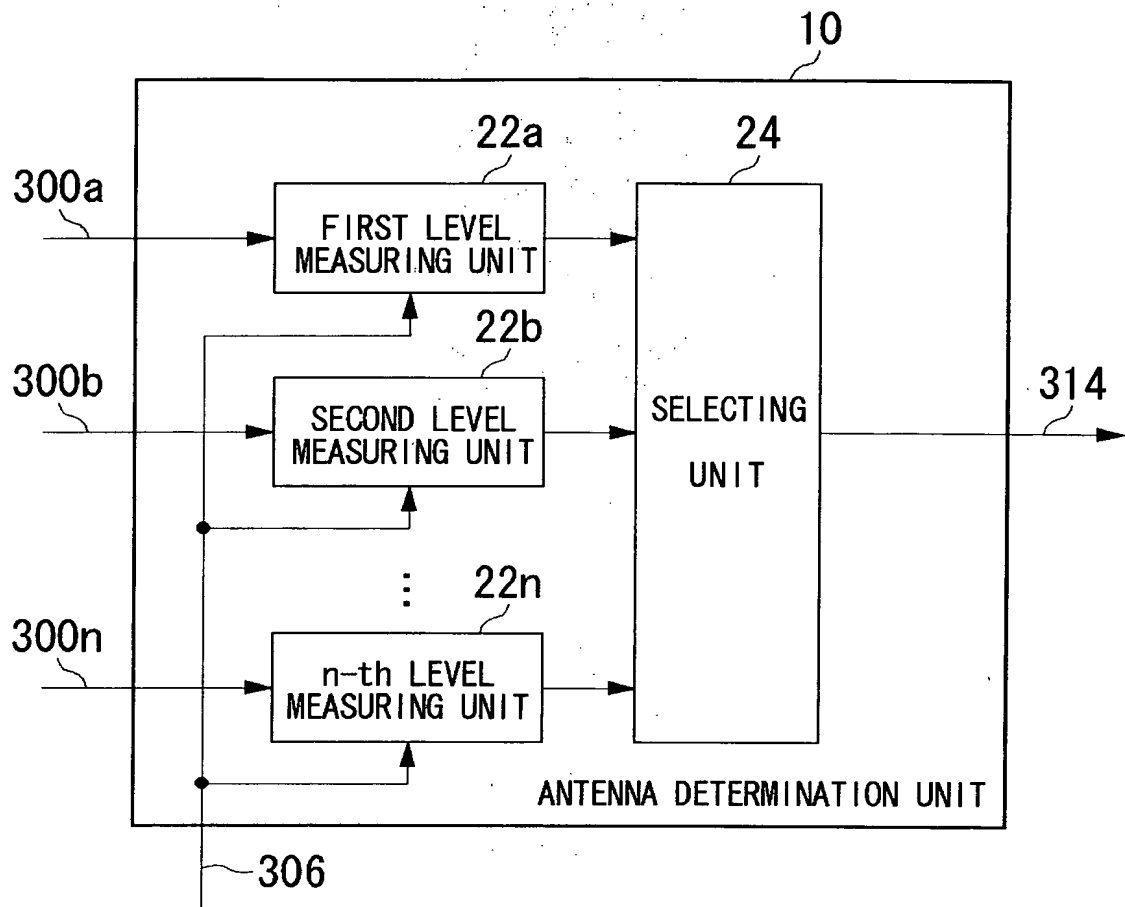


FIG.12

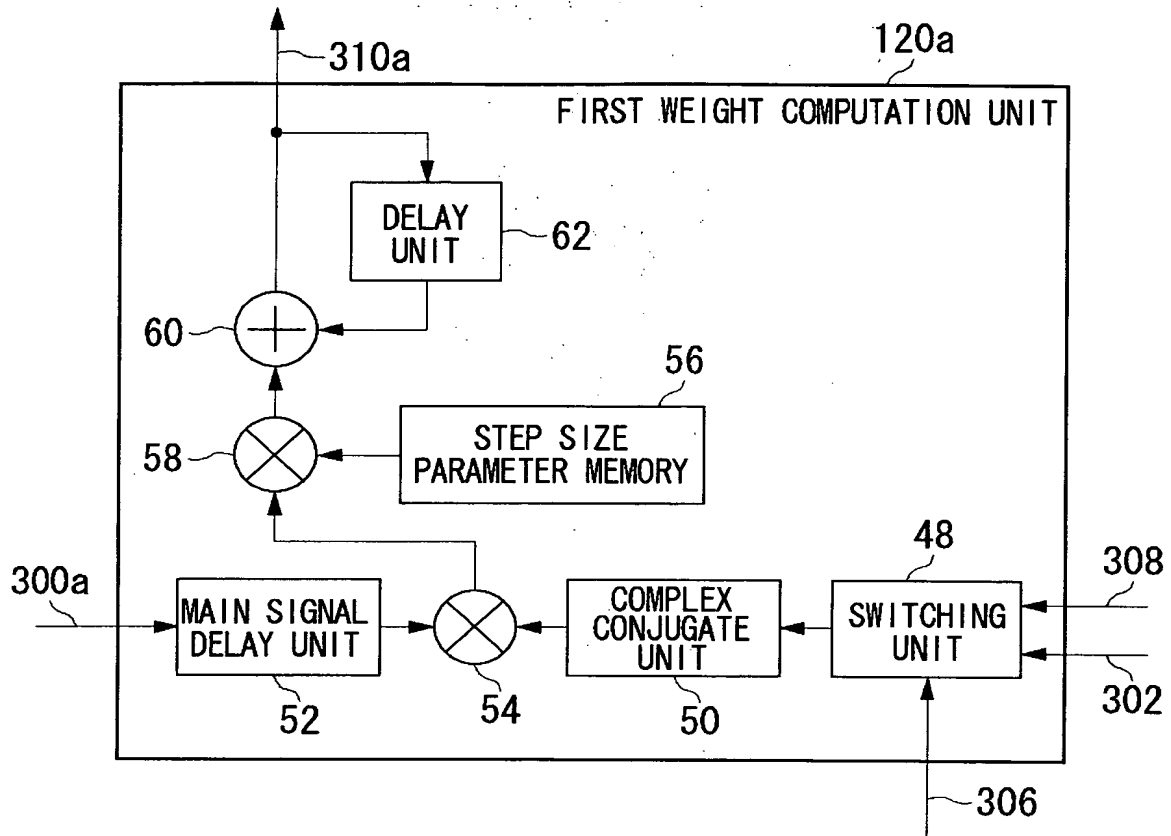


FIG.13

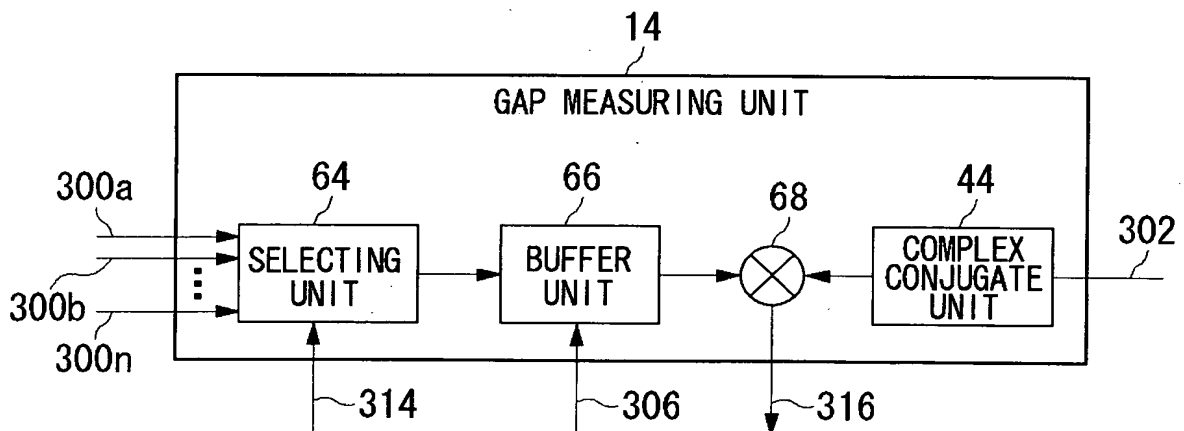


FIG.14

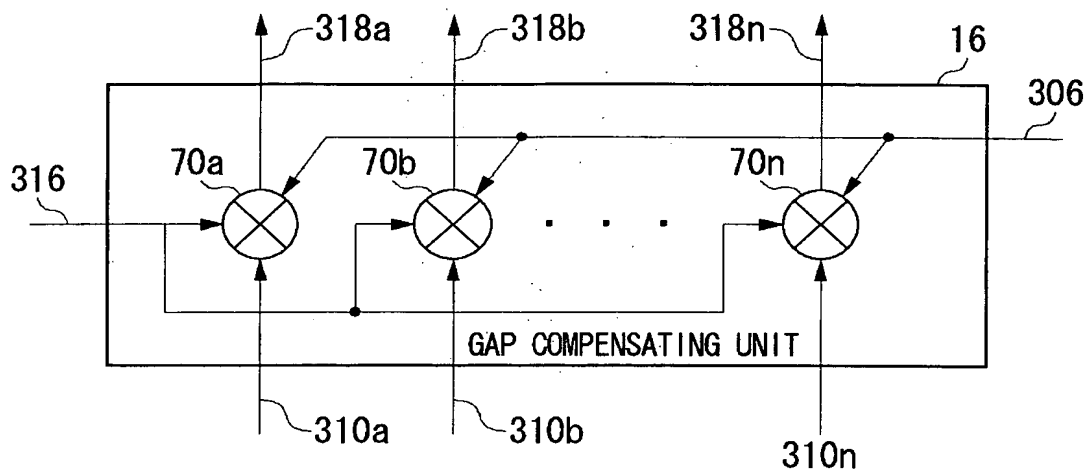


FIG.15

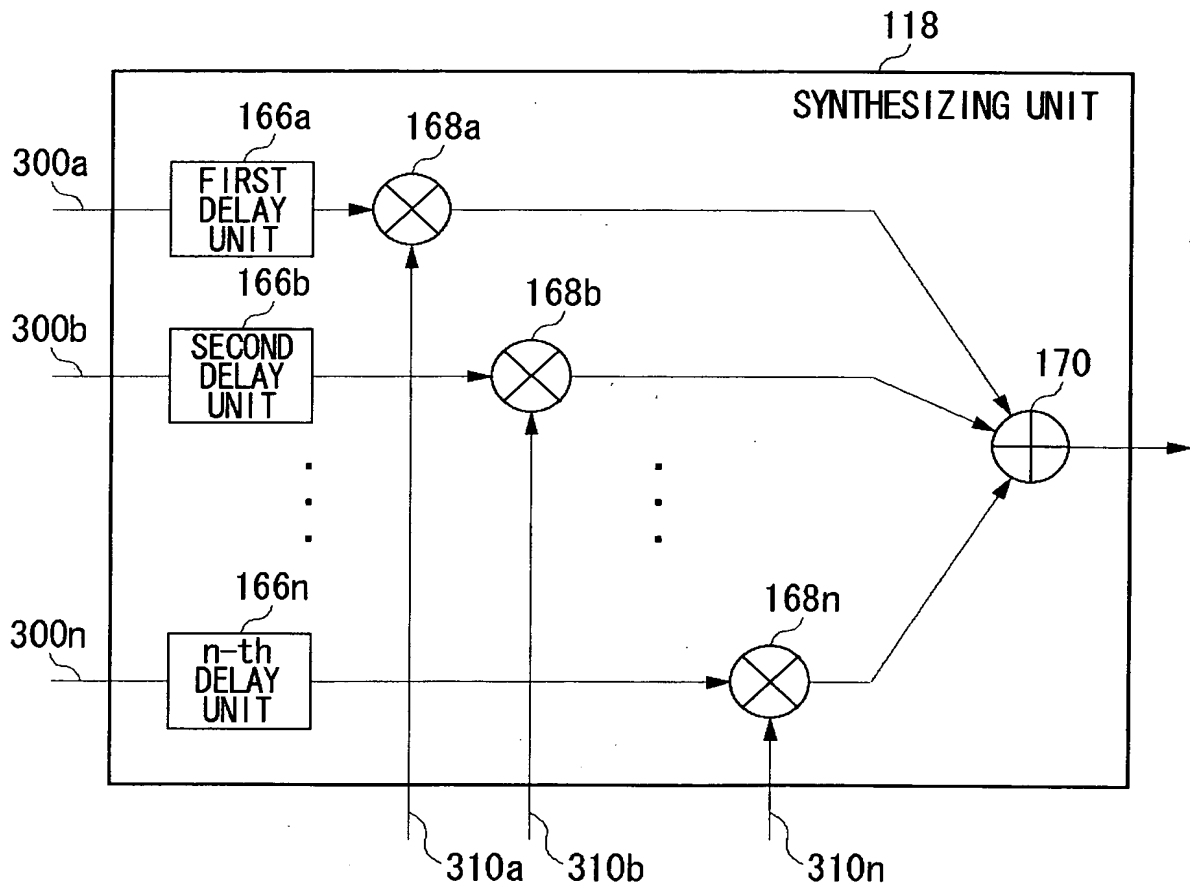




FIG.16

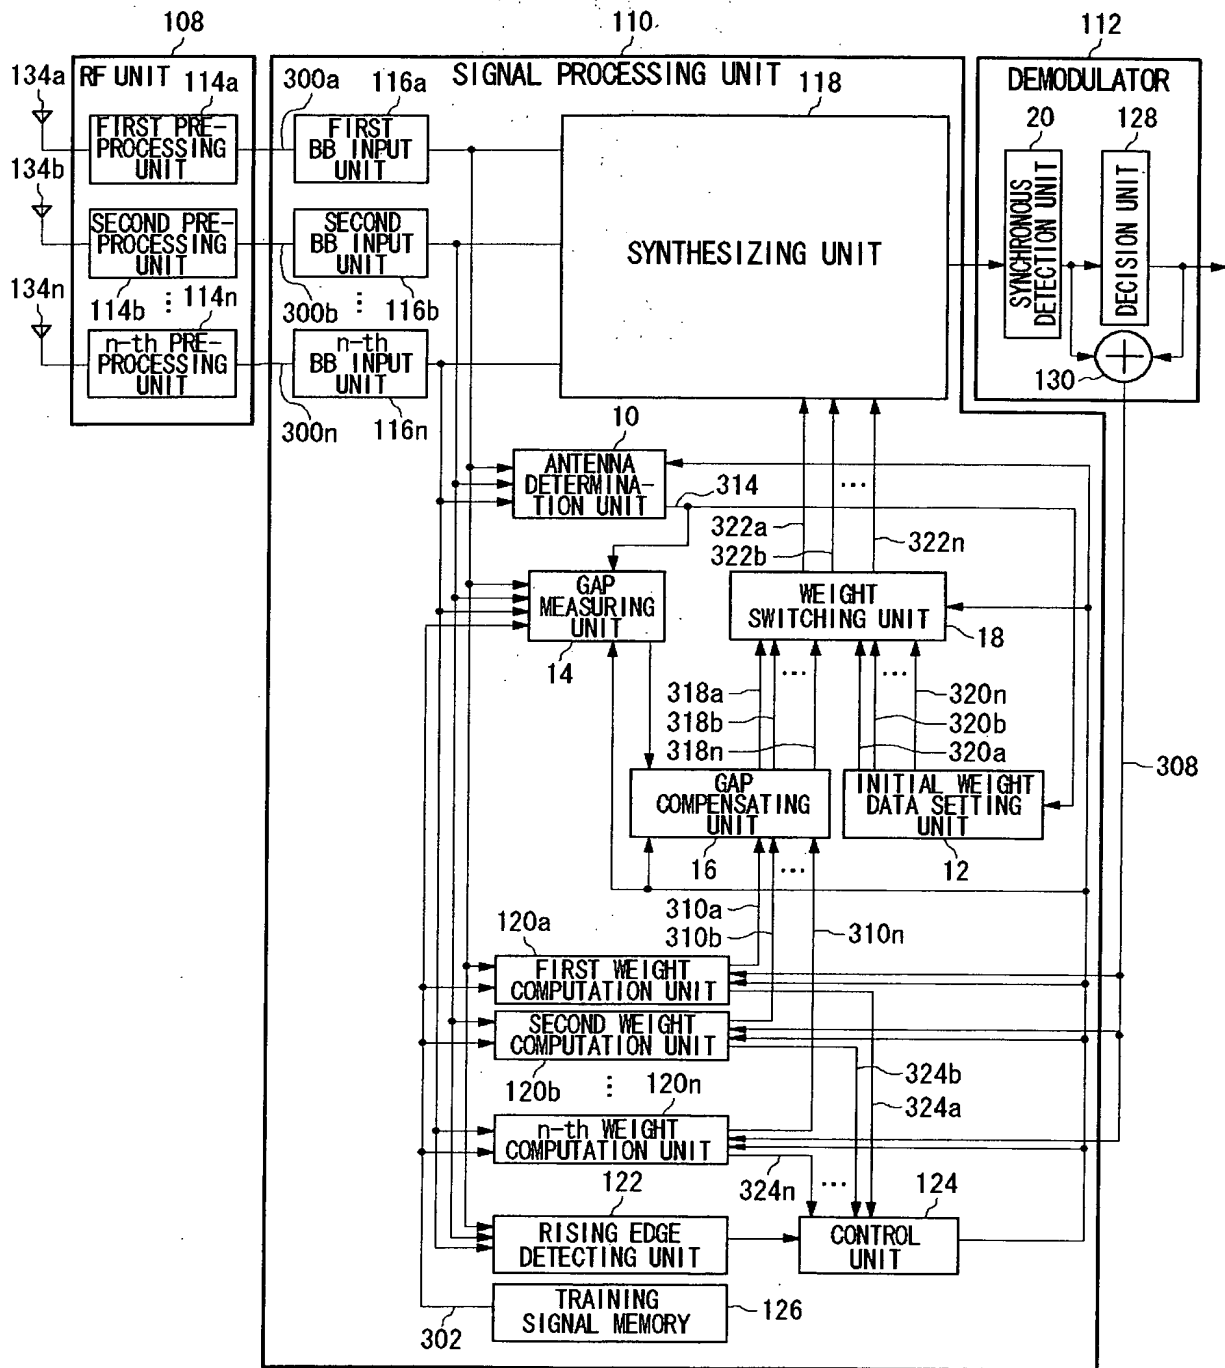


FIG.17

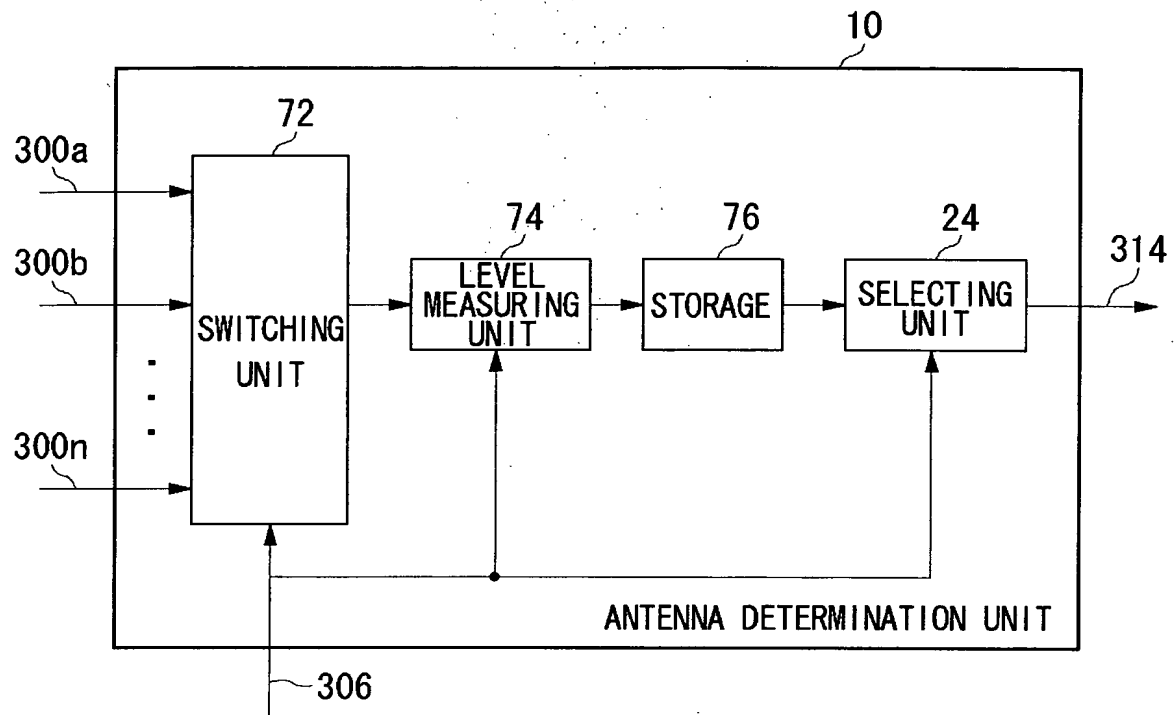


FIG. 18

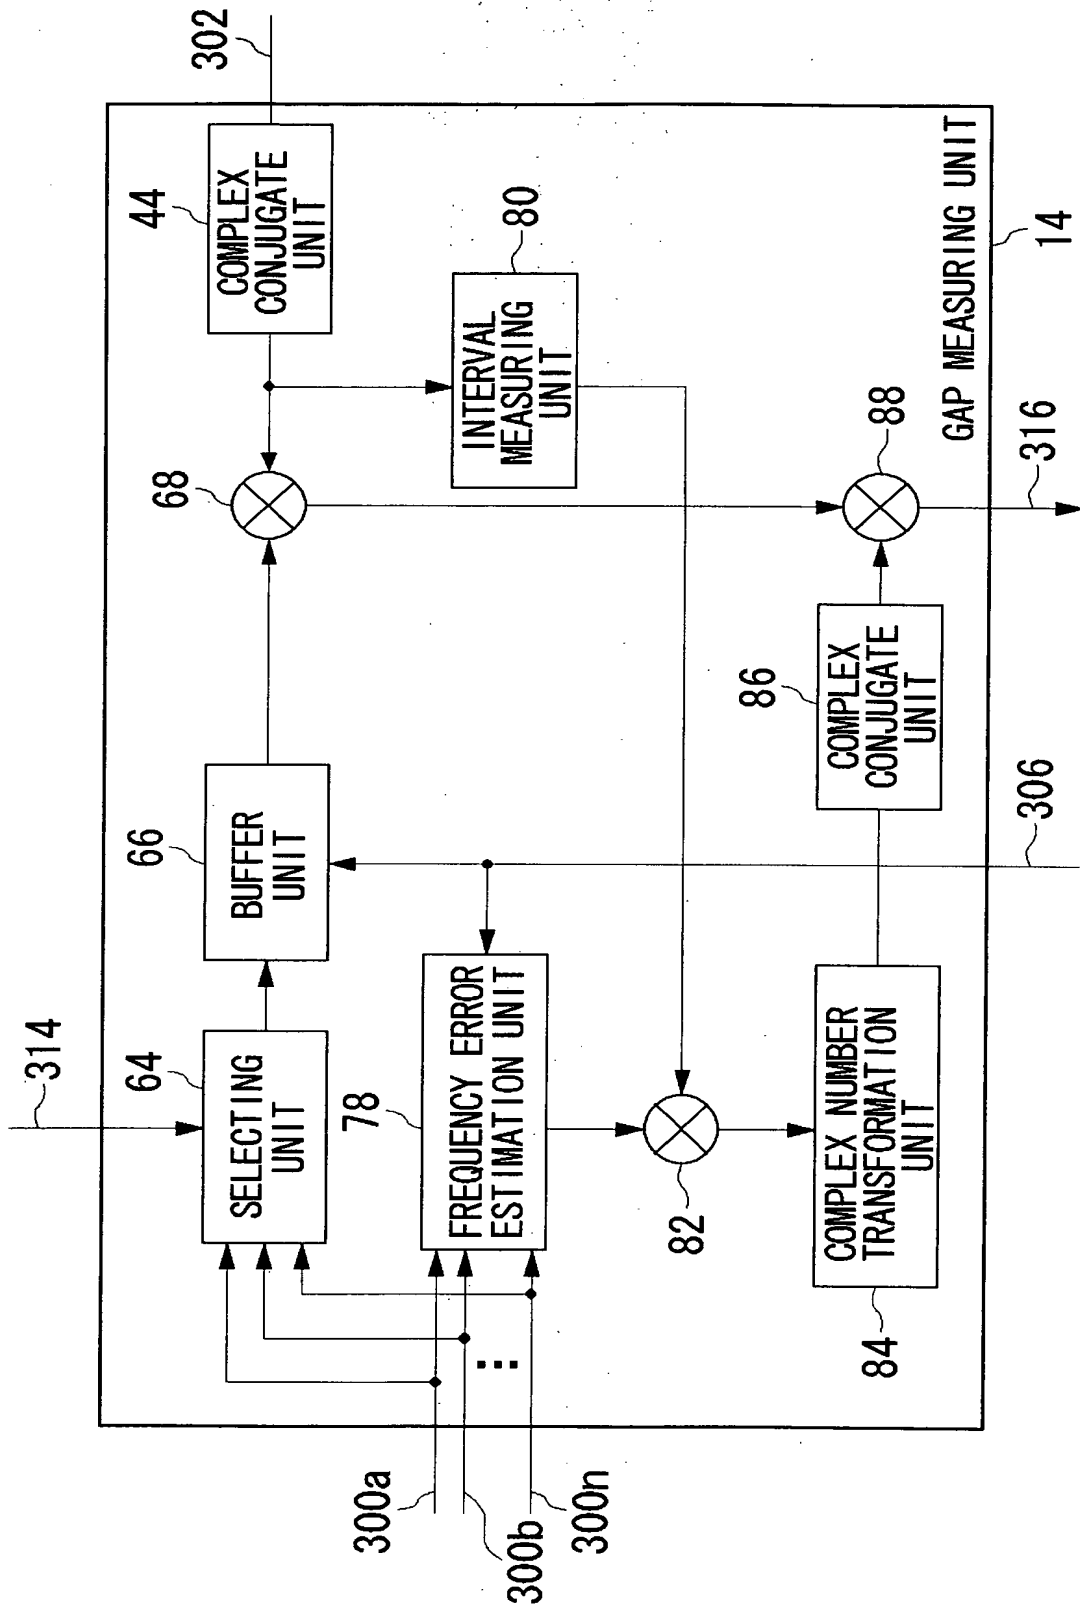


FIG.19

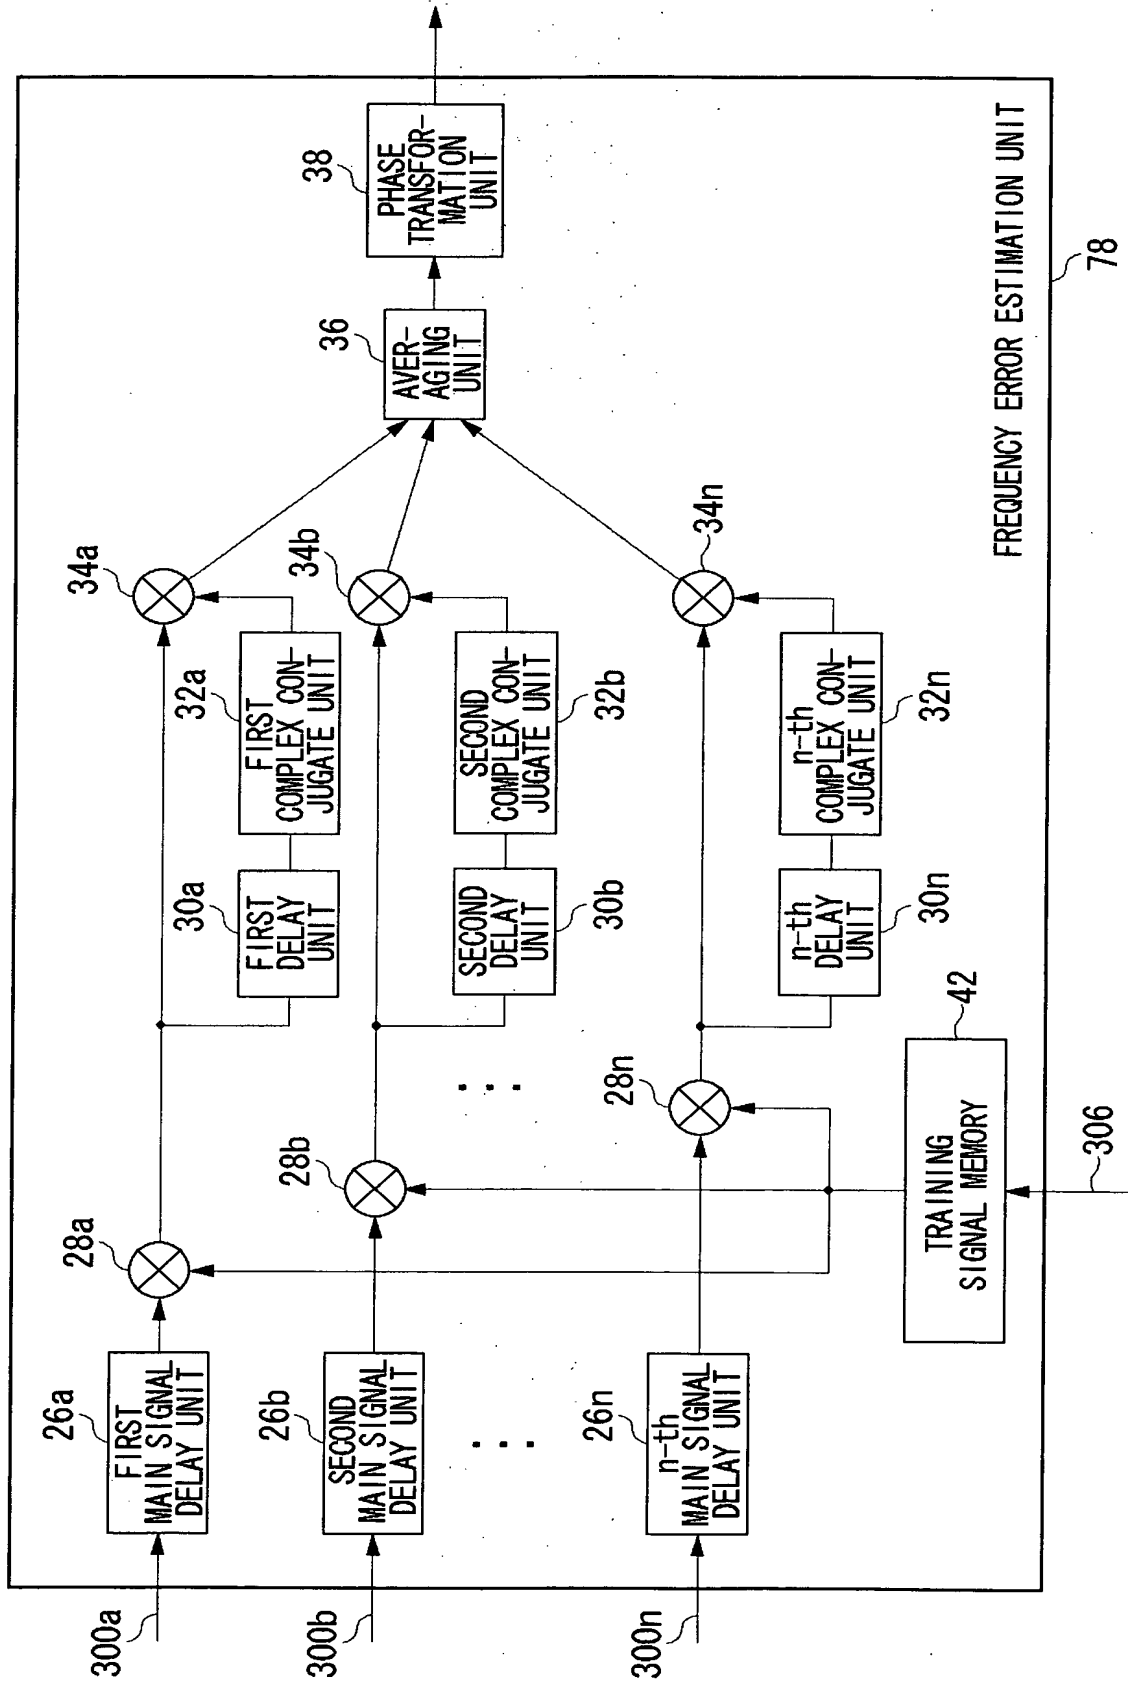


FIG.20

